



MINISTRY OF WORKS AND TRANSPORT

BRIDGES AND MAJOR CULVERTS VERIFICATION FIELD REPORT



SEPTEMBER 2025

TEAM MEMBERS

S/N	Name	Designation
1.	Eng. Catherine Nabanoba	Senior Engineer (Civil)
2.	Ms. Gloria Musiime	Engineer (Civil)
3.	Ms. Mutesi Chrisitine	Former Network technician
4.	Mr. Mulinda James	Fleet Assistant



TABLE OF CONTENTS

1.0 Background 3

2.0 Verification of bridge and major culvert structures 3

 2.1 Verified Bridges and Major Culvert Structures 3

3.0 Observations 13

4.0 Recommendations 13

5.0 Conclusion 13

1.0 Background

Reliable and safe transportation infrastructure is critical for economic development, mobility, and access to essential services. Bridges, as integral components of the road network, facilitate the movement of people, goods, and services across natural and artificial obstacles such as rivers, streams, ravines, and other terrain features. Ensuring that all existing bridge structures are accurately documented and assessed is essential for effective infrastructure planning, maintenance, and risk management.

In line with these objectives, a comprehensive bridges and major culvert structures inventory and verification exercise was undertaken. The purpose of this activity was twofold:

- 1) to verify the existence, condition, and characteristics of bridges already listed in the existing Bridges Management System (BMS) and
- 2) to identify and document any additional or previously unrecorded bridges and Major Culvert structures along the designated road corridors.

2.0 Verification of bridge and major culvert structures

A refresher training session was carried out to equip the team with the necessary knowledge and skills required to undertake the verification process. Possible risks involved in the exercise were also addressed putting emphasis on personal safety.

This exercise involved both desktop analysis using available geospatial and infrastructure data, and field verification to collect on-site information about the location, structural type, condition, and accessibility of each bridge or Major Culvert. This assessment will support better infrastructure asset management, planning for maintenance or upgrades, as well as reduce gaps in road safety and connectivity across the network.

For clarity, a Bridge was defined as structure with either any single span, measured horizontally at the soffit along the road centreline between the faces of its supports being greater or equal to 6m, or the individual clear spans being greater than 1.5m and the overall length between abutment faces being greater than 20m or opening height $\geq 6\text{m}$ or total cross-sectional opening $\geq 36\text{ m}^2$.

Similarly, a major culvert was defined as a structure normally buried with road fill or slabs on top, consisting of cellular units, Elements such as invert slabs, apron slabs, cut-off walls exist. The overall cross-sectional area should be equal or greater than 5m^2 .

During this exercise, the following tools were provided; handheld GPS, a 100m measuring tape, 7m measuring steel tape, hard copy bridge and major culvert inventory forms, pens, clip boards, digital camera, vehicle and personal protective equipment.

2.1 Verified Bridges and Major Culvert Structures

A total of 75 Bridges and 37 Major Culverts were verified and their geographical locations were captured as seen in figure 1 below. The detailed list of the verified structures is as detailed in annex 1A and 1B.

Pictorial evidence of Bridges and Major Culverts verification

Bridges





Waaki Bridge



Waiga Bridge



Namboole Bridge



Namboole Bridge



Namugongo overpass




Naalya – Kamuli foot bridge



Naalya Bridge



Naalya Bridge

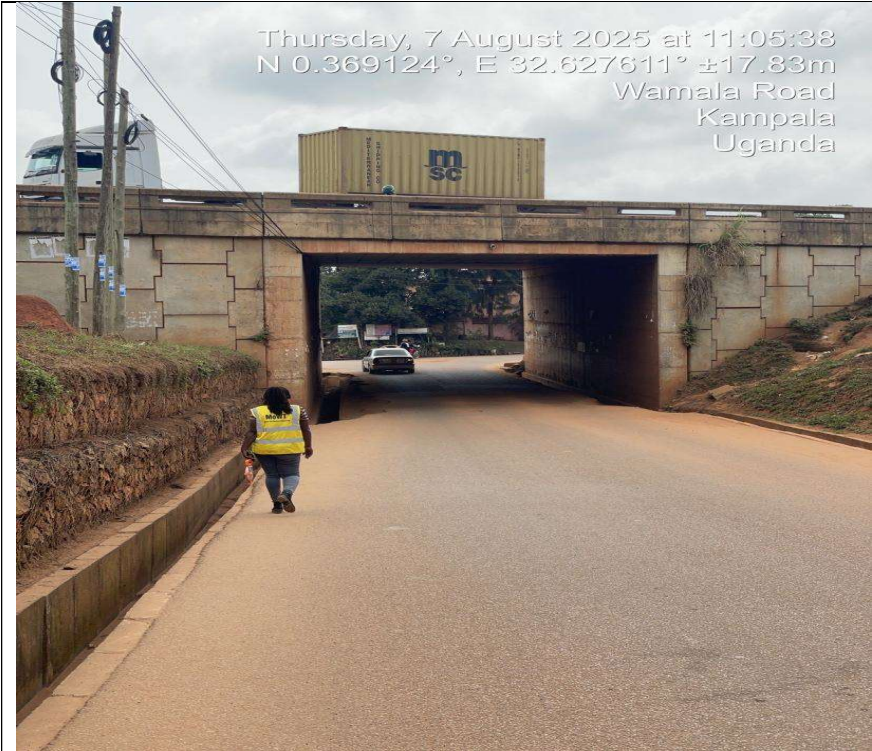

Kiwatule Underpass



Old Kira Bridge



Ntinda Foot bridge



Ntinda Bridge




Bukoto – Kisaasi over-bridge



Kyebando Foot Bridge




Bukoto – Kyebando Bridges

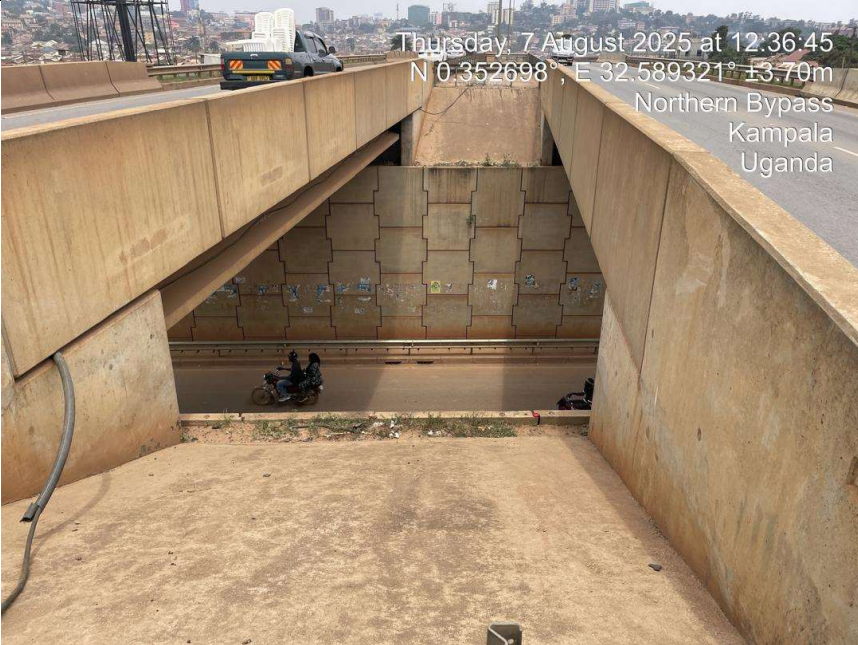





Kalerwe Bridges

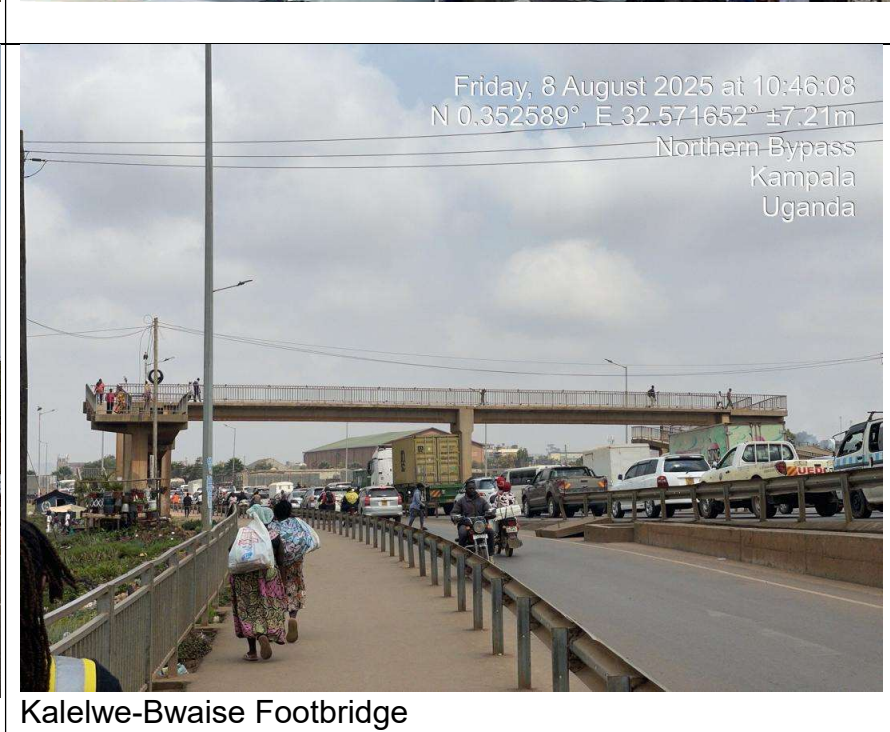


Kyebando Overbridge

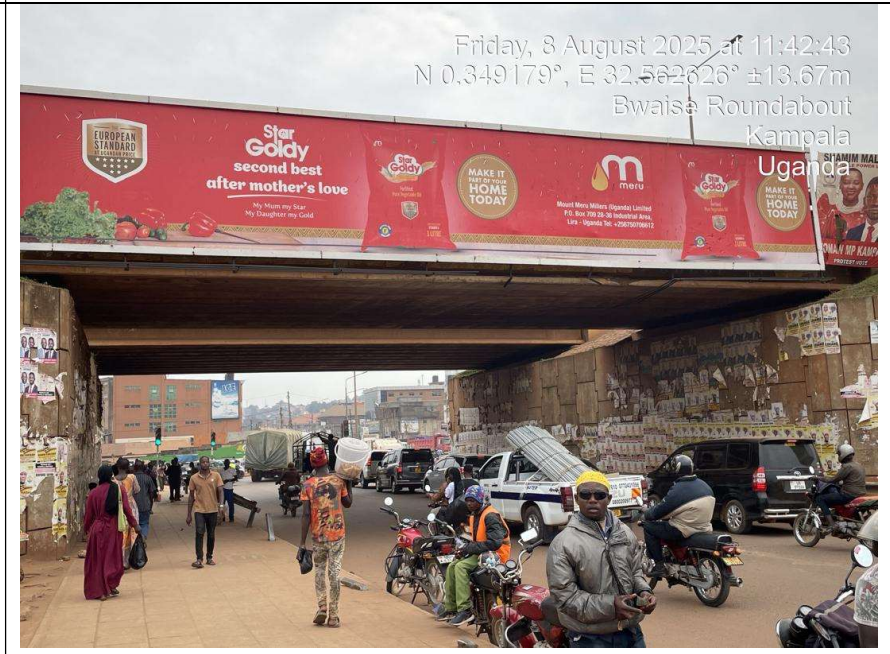

Bwaise bridges

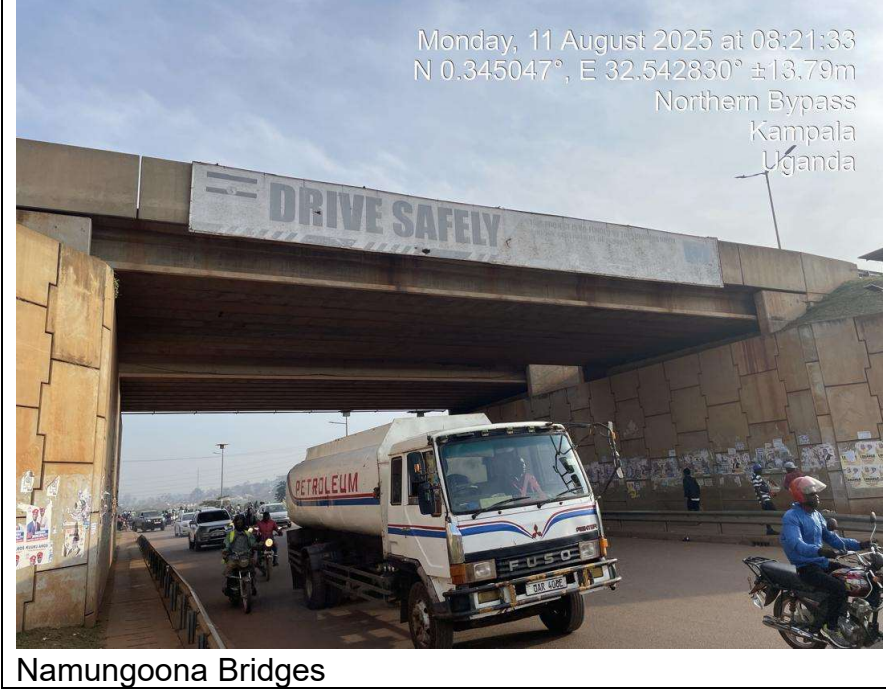


Namungoona Bridges

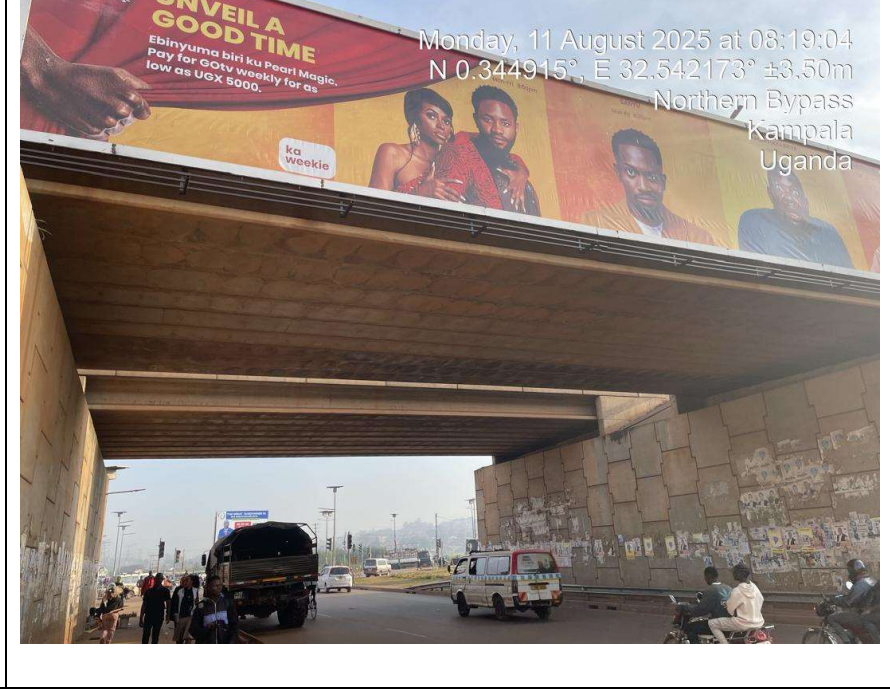




Sentema Bridges

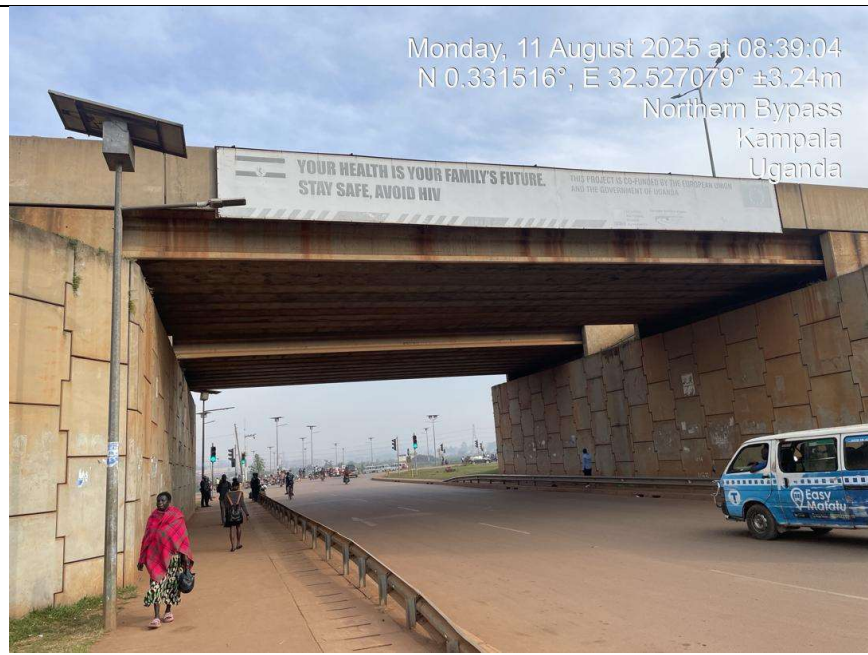


Kawala Overbridge

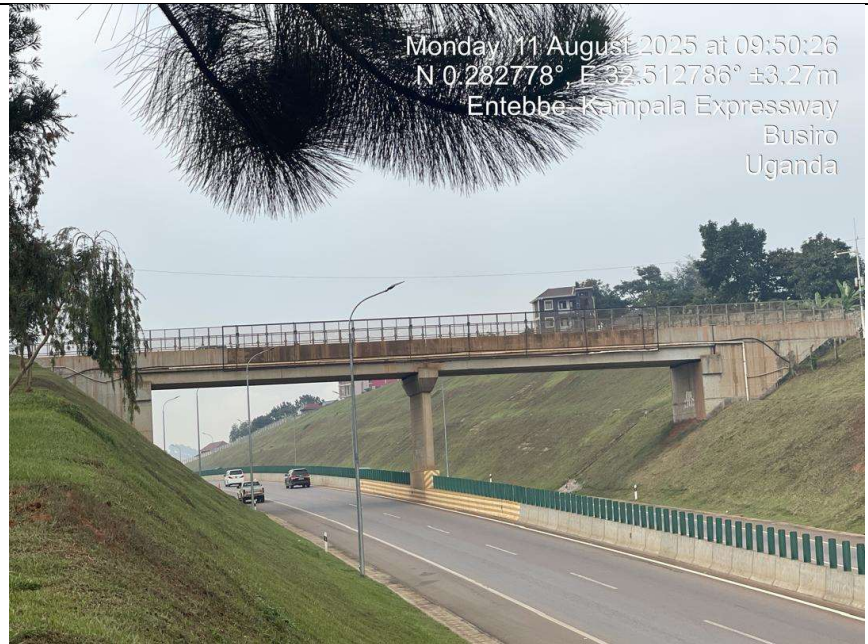

Kinaawa Bridge



Kinaawa Bridge 2

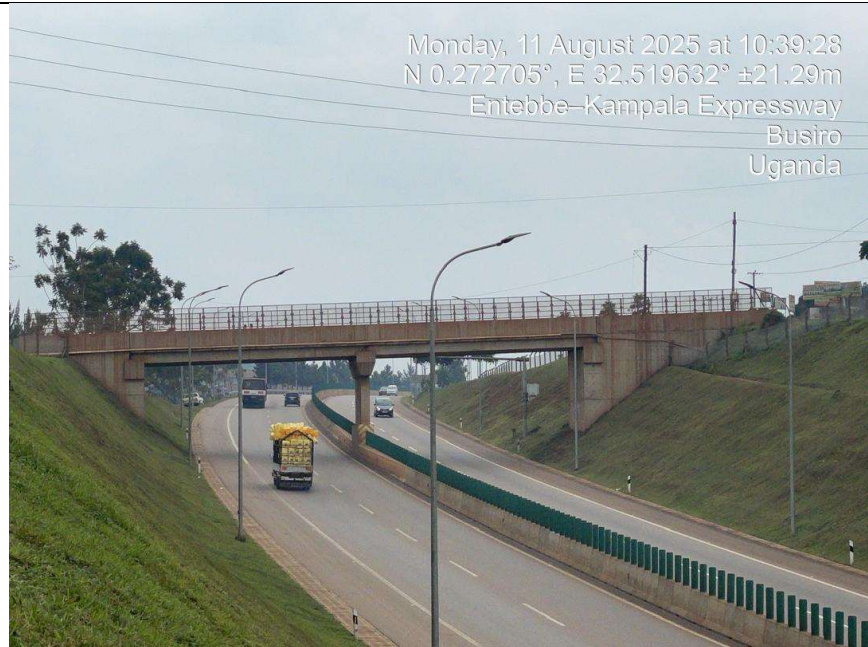

Baandwe Bridge




Nalumunye Underpass




Kakajo Bridge



Katali Bridge

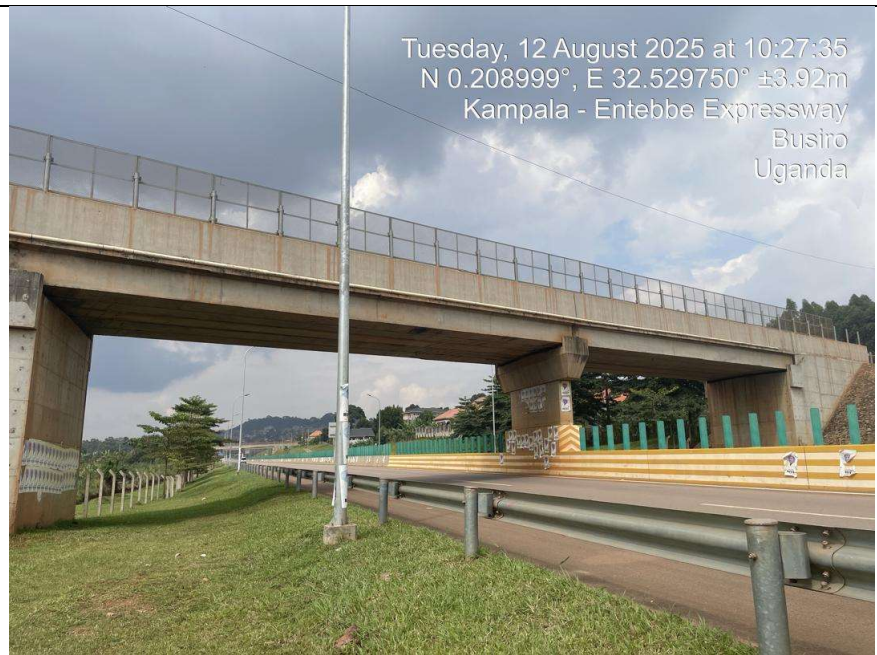


Kajansi over-bridge 1

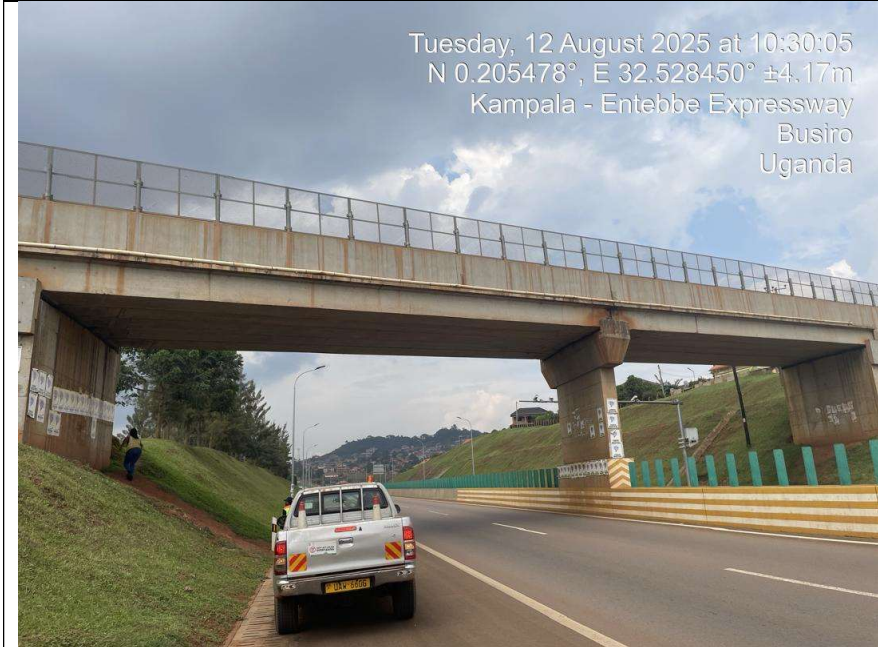


Kajansi Over-bridge 2




Kajansi Over-bridge 3

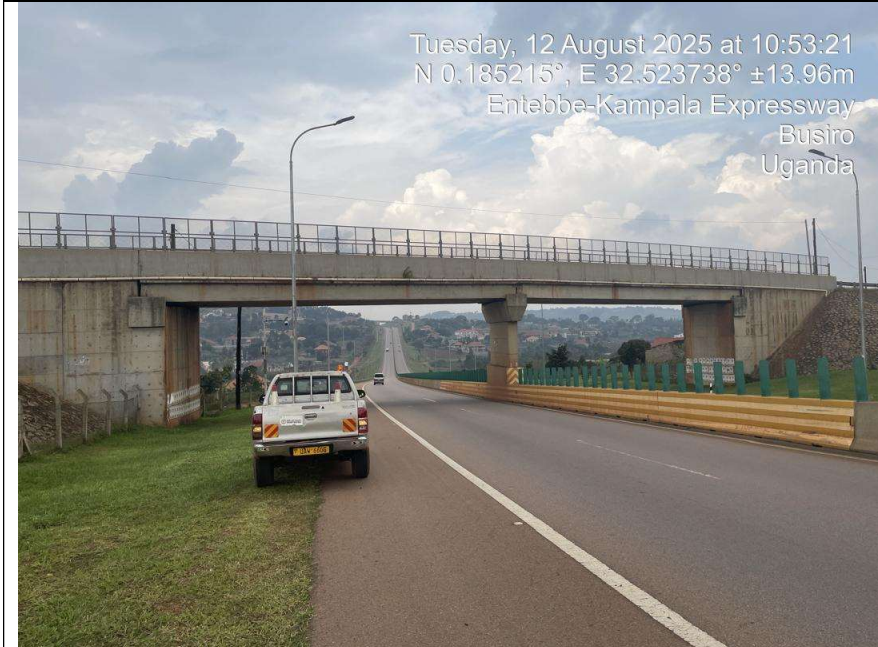

Bumuli over-bridge

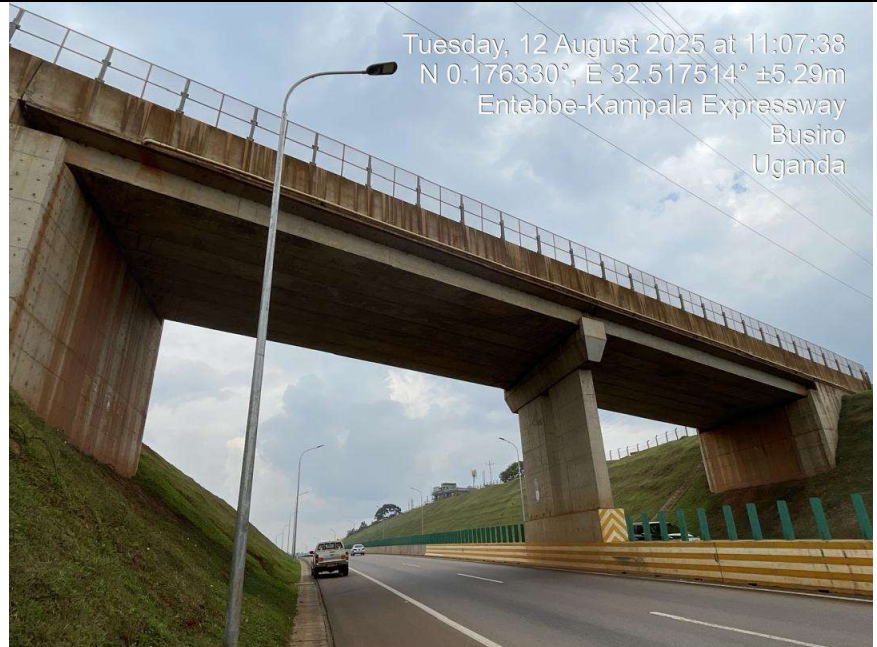

Bumuli over-bridge 2

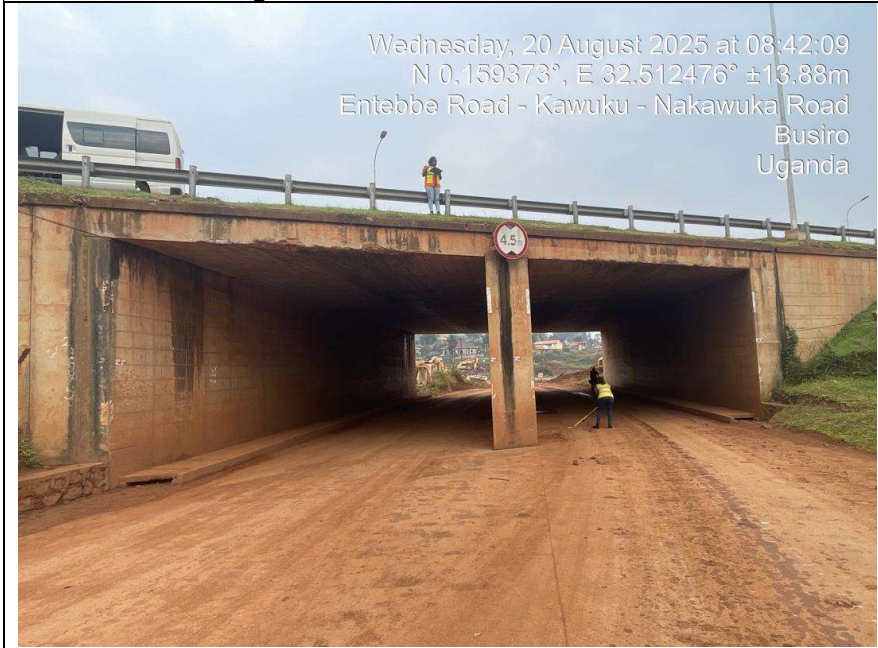

Sisa underpass Bridge



Wamala over-bridge



Ziiru Over-bridge



Bridge 3



Nambigirwa Bridge

Major Culverts



Bukoto round-about culverts



Kalerwe culverts






Bwaise Culverts



Baandwe Culvert




Culvert 1

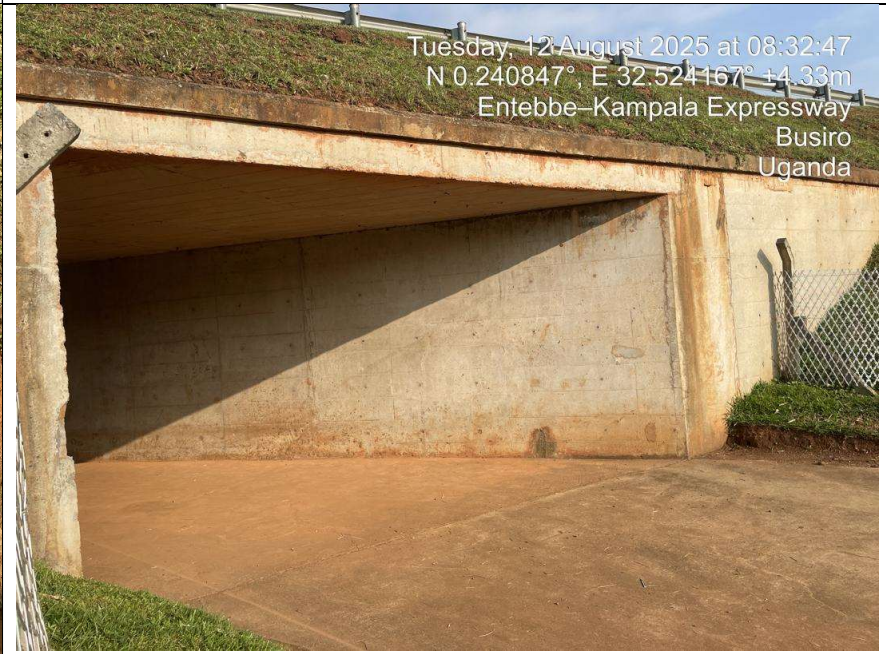

Culvert 2



Culvert 3

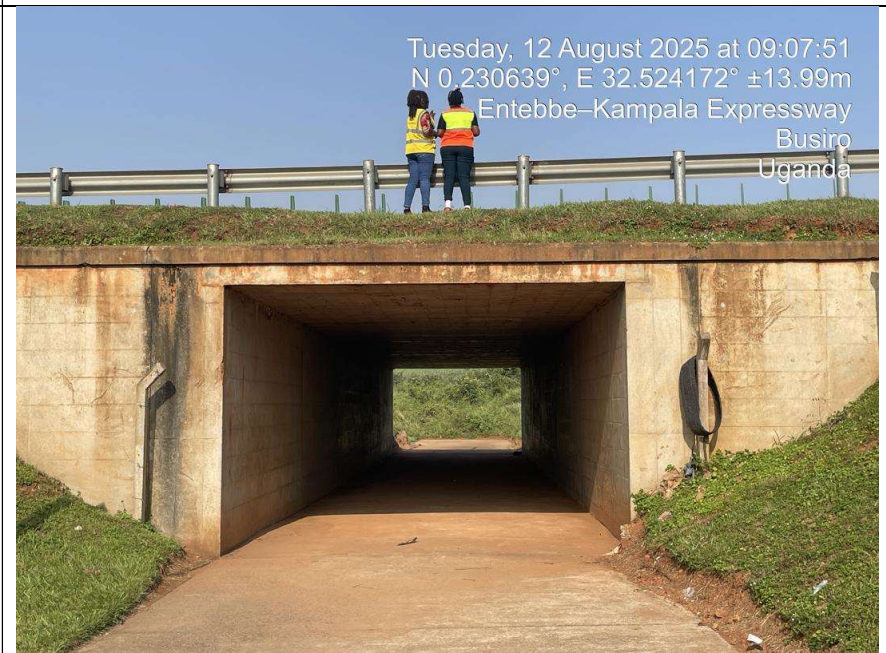


Katali Culvert



Nakigalala Culvert



Munyonyo-Spur Culvert

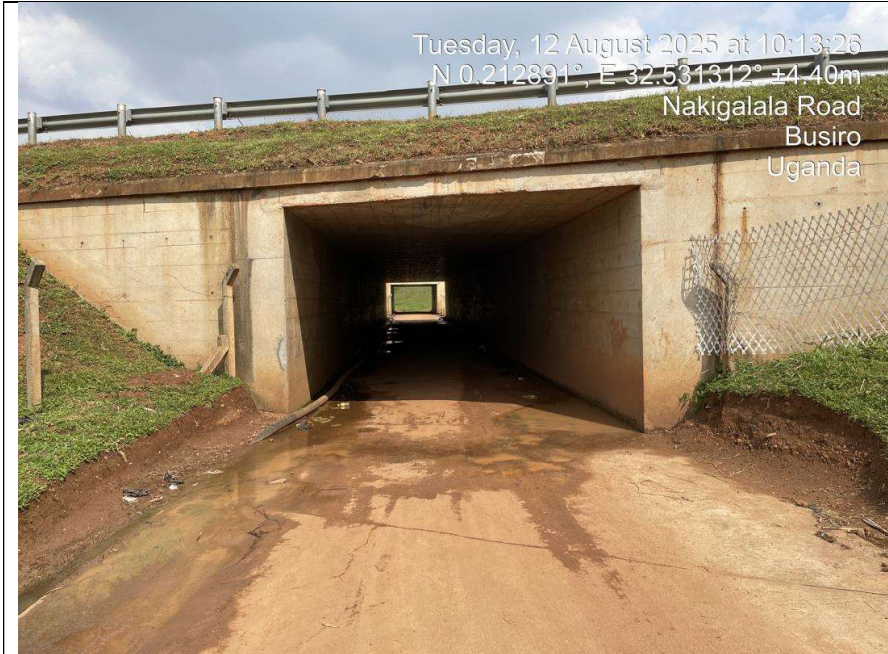

Kajansi underpass 1&2



Kajansi underpass 3



Kajansi underpass 4



Bamuli underpass



Underpass 1



Underpass 2



Underpass 3



Underpass 4



Culvert 1 Hoima (Parajwoki)-Biiso road



Culvert 2 Bukumi-Buliisa road



Culvert 3 Bukumi-Buliisa road



Culvert 4 Bukumi-Buliisa road



Culvert 5 Bukumi- Buliisa road



Culvert 6 Buliisa-Wanseko road

3.0 Observations

Below are some of the observations made during the inspection.

- a) By and large, most of the structures that were inspected were in good condition.
- b) It was observed that there is dumping of garbage at some bridge abutments along the northern bypass.
- c) The structures on Kampala Entebbe Expressway were constructed on very high embankments and some lack accessibility, hence making difficult to access the bridge deck. The process of accessing some of these was risky making the team members prone to accidents and loss of lives.
- d) Some Bridge or Major Culvert elements such as widths were not captured due to high speeding traffic on the Kampala Northern Bypass and the Kampala-Entebbe Expressway.

4.0 Recommendations

Below are some of the proposed recommendations.

- a) It is recommended that the maintenance team at Kampala station is requested to take necessary action to clear the garbage dumped at the abutments of some bridges along Northern Bypass.
- b) At locations where high-speed traffic is experienced, there is need to ensure safety on the road by the use of traffic police to control traffic during such exercises.

5.0 Conclusion

Despite a few challenges, such as captured in section 3.0 above, overall, the exercise was carried out successfully.

Prepared by

Christine Mutesi

Former Network Technician.



Annex 1A: List of verified Bridges.

S. NO	Road Link Name	X - Coordinate	Y - Coordinate	Survey Date	Bridge Name	Station
1	M20	32.6537	0.3484	8/7/2025	Namboole B1	Kampala
2	M20	32.6543	0.3488	8/7/2025	Namboole B2	Kampala
3	M20	32.6479	0.3636	8/7/2025	Namugongo OverBridge	Kampala
4	M20	32.6419	0.3649	8/7/2025	Nalya-Kamuli Flyover Foot bridge	Kampala
5	M20	32.6336	0.3631	8/7/2025	Nalya B1 LHS	Kampala
6	M20	32.6364	0.3636	8/7/2025	Nalya B2 LHS	Kampala
7	M20	32.6333	0.3636	8/7/2025	Nalya B1 RHS	Kampala
8	M20	32.6335	0.363	8/7/2025	Nalya B2 RHS	Kampala
9	M20	32.6277	0.3693	8/7/2025	Kiwatule under-pass	Kampala
10	M20	32.6247	0.3692	8/7/2025	Old Kira road Over Bridge	Kampala
11	M20	32.6108	0.3658	8/7/2025	Ntinda foot bridge	Kampala
12	M20	32.6045	0.3651	8/7/2025	Ntinda B1	Kampala
13	M20	32.6051	0.3655	8/7/2025	Ntinda B2	Kampala
14	M20	32.5985	0.3587	8/7/2025	Bukoto-Kisasi over Bridge	Kampala
15	M20	32.5893	0.3525	8/7/2025	Bukoto-Kyebando B1 RHS	Kampala
16	M20	32.5892	0.3526	8/7/2025	Bukoto-Kyebando B1 LHS	Kampala
17	M20	32.5889	0.3521	8/7/2025	Bukoto-Kyebando B2 LHS	Kampala
18	M20	32.5889	0.3521	8/7/2025	Bukoto-Kyebando B2 RHS	Kampala
19	M20	32.5866	0.3497	8/8/2025	Kyebando foot bridge	Kampala
20	M20	32.5795	0.3505	8/8/2025	Kyebando over bridge	Kampala
21	M20	32.5723	0.3526	8/8/2025	Kalerwe B1 RHS	Kampala
22	M20	32.5715	0.3526	8/8/2025	Kalerwe B2 RHS	Kampala
23	M20	32.5715	0.3526	8/8/2025	Kalerwe B2 LHS	Kampala
24	M20	32.5723	0.3526	8/8/2025	Kalerwe B1 LHS	Kampala
25	M20	32.5691	0.3526	8/8/2025	Kalerwe Foot bridge	Kampala
26	M20	22.5633	0.3494	8/8/2025	Bwayise B1 RHS	Kampala
27	M20	32.5626	0.3493	8/8/2025	Bwayise B2 RHS	Kampala
28	M20	32.5626	0.3493	8/8/2025	Bwayise B1 LHS	Kampala
29	M20	32.5626	0.3493	8/8/2025	Bwayise B2 LHS	Kampala
30	M20	32.5534	0.3471	8/8/2025	Kawaala Bridge	Kampala
31	M20	32.5428	0.3452	8/11/2025	Namungoona B2	Kampala
32	M20	32.5428	0.3452	8/11/2025	Namungoona B22	Kampala
33	M20	32.5422	0.345	8/11/2025	Namungoona B1	Kampala
34	M20	32.5422	0.345	8/11/2025	Namungoona B12	Kampala
35	M20	32.5274	0.3322	8/11/2025	Sentema B2	Kampala
36	M20	32.5274	0.3322	8/11/2025	Sentema B22	Kampala
37	M20	32.527	0.3316	8/11/2025	Sentema B1	Kampala
38	M20	32.527	0.3316	8/11/2025	Sentema B12	Kampala
39	M3	32.5146	0.3146	8/11/2025	Busega	Kampala
40	M3	32.5146	0.3146	8/11/2025	Busega	Kampala
41	M3	32.5126	0.3033	8/11/2025	KEE B1	Kampala



THE REPUBLIC OF UGANDA

Bridge and Major Culvert structures verification

S. NO	Road Link Name	X - Coordinate	Y - Coordinate	Survey Date	Bridge Name	Station
42	M3	32.5126	0.3033	8/11/2025	KEE B12	Kampala
43	M3	32.5126	0.2999	8/11/2025	KEE B2	Kampala
44	M3	32.5126	0.2999	8/11/2025	KEE B22	Kampala
45	M3	32.5131	0.2817	8/11/2025	KEE B3 overpass	Kampala
46	M3	32.5157	0.2781	8/11/2025	KEE B4 overpass	Kampala
47	M3	32.52	0.271	8/11/2025	KEE B5	Kampala
48	M3	32.5208	0.2664	8/11/2025	KEE B6 underpass	Kampala
49	M3	32.5215	0.2596	8/11/2025	KEE B7 Overbridge	Kampala
50	M3	32.5224	0.2525	8/11/2025	KEE B8 overbridge	Kampala
51	M3	32.5235	0.2324	8/12/2025	KEE B9 overbridge	Kampala
52	M3	32.5313	0.2153	8/12/2025	Kajjansi interchange KEE B10	Kampala
53	M3	32.5313	0.2153	8/12/2025	Kajjansi interchange KEE B11	Kampala
54	M3	32.5295	0.2087	8/12/2025	Kajjansi overbridge 1 KEE B11	Kampala

Annex 1A: List of verified Bridges.

S. NO	Road Link Name	X - Coordinate	Y - Coordinate	Survey Date	Bridge Name	Station
55	M3	32.5282	0.2053	8/12/2025	Kajjansi overbridge 2 KEE B12	Kampala
56	M3	32.5262	0.1974	8/12/2025	Kajjansi overbridge 3 KEE 13	Kampala
57	M3	32.5234	0.1849	8/12/2025	Bumuli overbridge	Kampala
58	M3	32.5173	0.176	8/12/2025	Bumuli overbridge 2	Kampala
59	M3	32.5124	0.1594	8/20/2025	Sisa Bridge underpass	Kampala
60	M3	32.5107	0.1485	8/20/2025	19+580 Over-bridge	Kampala
61	M3	32.5104	0.1452	8/20/2025	Ziiru overbridge	Kampala
62	M3	32.5104	0.1358	8/20/2025	Ziiru overbridge 2	Kampala
63	M3	32.5114	0.1266	8/20/2025	Nambigirwa Bridge 1	Kampala
64	M3	32.5114	0.1266	8/20/2025	Nambigirwa Bridge 2	Kampala
65	M3	32.5126	0.1064	8/20/2025	Mpaalla 1	Kampala
66	M3	32.5123	0.1058	8/20/2025	Mpaalla 2	Kampala
67	M3	32.5118	0.105	8/20/2025	Mpaalla 3	Kampala
68	Hoima-Biiso	31.3761	1.7092	8/18/2025	Waaki Bridge	Hoima
69	Bukumi-Buliisa	31.4753	1.9923	8/18/2025	Waiga Bridge	Hoima
70	Park Junction Paraa	31.5644	2.2843	8/18/2025	Paraa Bridge	Masindi
71	Park Junction Paraa	31.5647	2.2893	8/18/2025	Paraa Bridge 2	Masindi
72	Kisanja-Park Junction	31.697	2.1782	8/18/2025	Sambia Bridge	Masindi
73	Kisanja-Park Junction	31.7062	2.1485	8/18/2025	B3(K-P5)	Masindi
74	Kisanja-Park Junction	31.716	2.0971	8/18/2025	B2(K-P5)	Masindi
75	Kisanja-Park Junction	31.7167	2.0592	8/18/2025	B1(K-P5)	Masindi

Annex 1B: List of verified Major Culverts.

S. NO	Road Link Name	X - Coordinate	Y - Coordinate	Survey Date	Region	Station
1	M20	32.5897	0.3521	8/8/2025	Central	Kampala
2	M20	32.572	0.3523	8/8/2025	Central	Kampala
3	M20	32.572	0.3523	8/8/2025	Central	Kampala
4	M20	32.5665	0.3505	8/8/2025	Central	Kampala
5	M3	32.5206	0.2691	8/11/2025	Central	Kampala
6	M3	32.5226	0.2545	8/11/2025	Central	Kampala
7	M3	32.5241	0.24	8/12/2025	Central	Kampala
8	M3	32.5241	0.2408	8/12/2025	Central	Kampala
9	M3	32.5241	0.24	8/12/2025	Central	Kampala
10	M3	32.5241	0.2306	8/12/2025	Central	Kampala
11	M3	32.5268	0.2259	8/12/2025	Central	Kampala
12	Munyoyo Spur	32.5319	0.2158	8/12/2025	Central	Kampala
13	M3	32.531	0.2128	8/12/2025	Central	Kampala
14	M3	32.531	0.2128	8/12/2025	Central	Kampala
15	M3	32.5269	0.2012	8/12/2025	Central	Kampala
16	M3	32.525	0.1882	8/12/2025	Central	Kampala
17	M3	32.5206	0.1808	8/12/2025	Central	Kampala
18	M3	32.5147	0.1691	8/20/2025	Central	Kampala
19	M3	32.5134	0.1641	8/20/2025	Central	Kampala
20	M3	32.5114	0.1542	8/20/2025	Central	Kampala
21	M3	32.5101	0.1391	8/20/2025	Central	Kampala
22	Biiso	32.3502	1.5161	8/17/2025	Western	Hoima
23	Biiso-Bukumi	31.382	1.7861	8/17/2025	Western	Hoima
24	Biiso-Buliisa	31.3938	1.8415	8/17/2025	Western	Hoima
25	Biiso-Buliisa	31.4065	1.8814	8/17/2025	Western	Hoima
26	Biiso-Buliisa	31.4256	1.9248	8/17/2025	Western	Hoima
27	Biiso-Buliisa	31.4264	1.9265	8/17/2025	Western	Hoima
28	Biiso-Buliisa	31.4277	1.9295	8/17/2025	Western	Hoima
29	Biiso-Buliisa	31.4279	1.9299	8/17/2025	Western	Hoima
30	Biiso-Buliisa	31.4641	1.9658	8/17/2025	Western	Hoima
31	Biiso-Buliisa	31.4764	1.9903	8/17/2025	Western	Hoima
32	Bukumi-Buliisa	31.4759	1.9913	8/17/2025	Western	Hoima
33	Bukumi-Buliisa	31.4737	1.9944	8/17/2025	Western	Hoima
34	Bukumi-Buliisa	31.4626	2.0122	8/17/2025	Western	Hoima
35	Buliisa-Wanseko	31.4078	2.127	8/17/2025	Western	Hoima
36	Buliisa-Wanseko	31.4077	2.1308	8/17/2025	Western	Hoima
37	Buliisa-Wanseko	31.4042	2.1532	8/17/2025	Western	Hoima

