



THE REPUBLIC OF UGANDA

MINISTRY OF WORKS AND TRANSPORT

VISUAL CONDITION SURVEY (MOBICAP)

FIELD SURVEY REPORT

for

MPIGI AND SOUTH WESTERN PAVED NATIONAL ROAD NETWORK



AUGUST 2025



TABLE OF CONTENTS

1.0 Background 3

2.0 Visual Condition Assessment Survey 3

3.0 Assessed Roads..... 3

2.1 Pictorial evidence of Road Condition 3

4.0 Observations 7

5.0 Recommendations 7

6.0 Conclusion 8

Annex 1: List of Roads Surveyed

1.0 Background

The condition of paved roads plays a critical role in ensuring safe, efficient and reliable transportation for road users. Regular visual assessments of the national road network are essential to monitor pavement deterioration, identify and prioritize maintenance needs.

This report presents the findings of a network level visual assessment conducted to evaluate the current state of the paved national roads in Mpigi and South Western regions of Uganda. The findings will support decision-making processes for maintenance, rehabilitation and reconstruction interventions that ensure all year mobility.

2.0 Visual Condition Assessment Survey

A visual inspection for each km of the road section was conducted to assess the condition of the road surface and immediate areas such as the shoulders and drainage. The survey was conducted from slowly moving vehicle driving near the road shoulder and frequent stops were made to enable close examination of the surface and road surroundings.

The following pavement defects were collected over a rating scale of 1 (no defects) to 5 (failed/very poor), apart from potholes which are measured in m²:

- All Cracking;
- Wide Cracking;
- Potholes and Structural Failures and Depth;
- Width Loss;
- Edge Drop;
- Surface Deterioration;
- Rutting and Isolated Problems;
- Drainage on/off Road;
- Shoulder Condition
- Road Side Friction

The exercise was carried out in the period from June 2025 to August 2025 by the following Personnel;

- | | | |
|------|------------------------|-------------------------|
| i) | Gary Cosma Matovu | Senior Engineer (Civil) |
| ii) | Paul Mutalya | Engineer (Civil) |
| iii) | Christine Kabasoomi | Filed Assistant |
| iv) | Tusiime David Abagiira | Fleet Assistant |

3.0 Assessed Roads

A total of over 1,700 km of paved roads covering districts of Mipigi, Mityana, Sembabule, Masaka, Rakai, Lyantonde, Mbarara, Kiruhura, Kazo, Ibanda, Kamwenge, Bushenyi, Rubirizi, Kasese, Mitooma, Rukungiri, Kanungu, Ntungamo, Isingiro, Rukiga, Kabale, Rubanda, and Kisoro were assessed as detailed in annex 1

2.1 Pictorial evidence of Road Condition




B153_Link01 Kabale - Ikumba – Muko



B153_Link02 Muko - Nyakabande - Kisoro



C350_Link02 Isingiro - Nsongezi

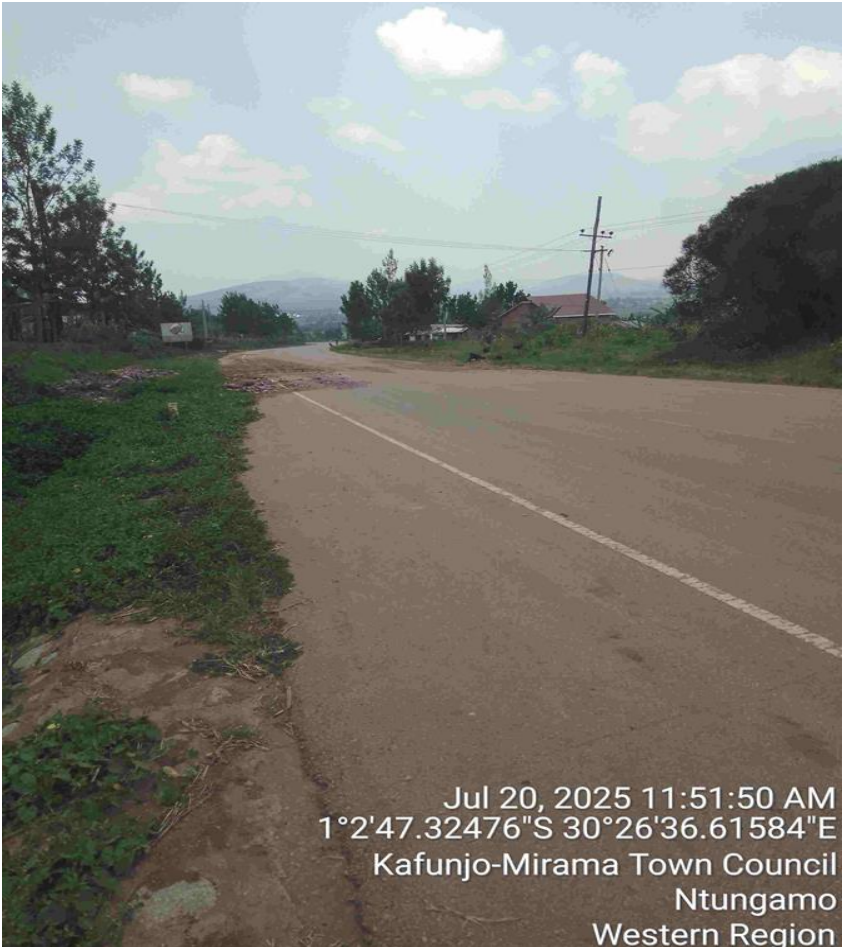



C428_Link01 Nyamirama - Ishasha



B152_Link01 Ntungamo - Kagamba



A002_Link08 Mbarara (Bushenyi Junction) – Ntungamo

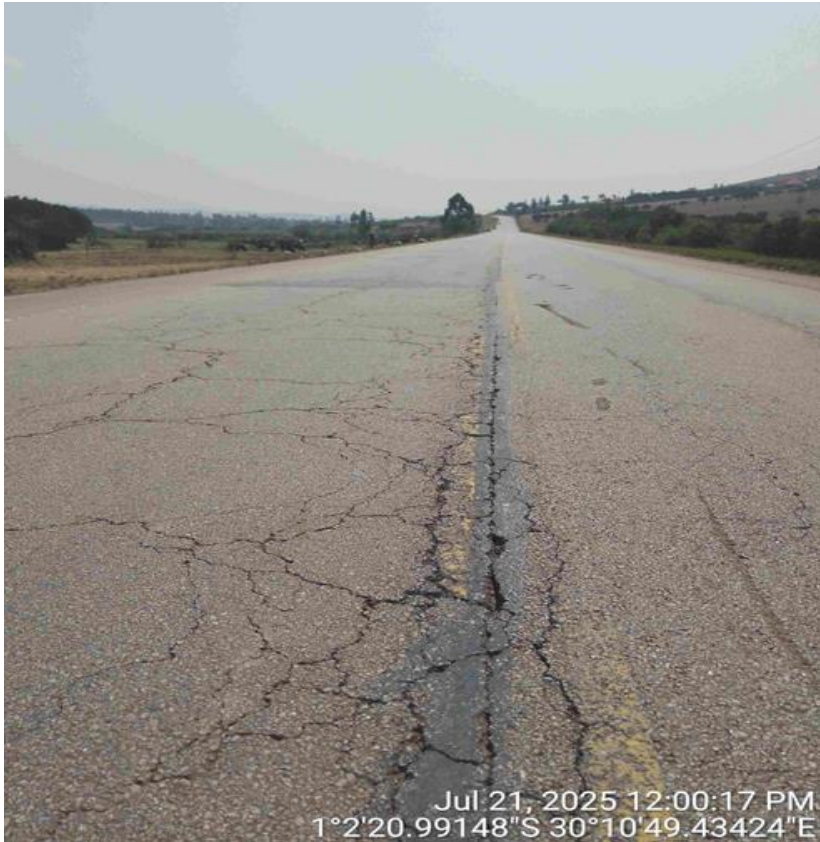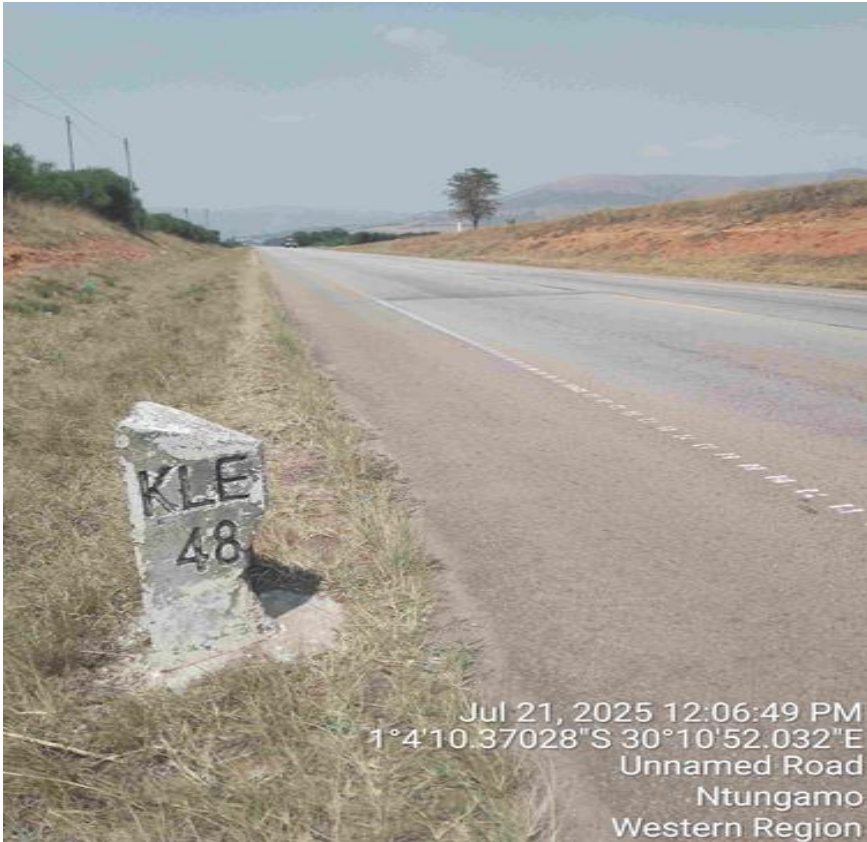

A002_Link10 Rubaale - Muhanga - Kabale



C433_Link02 Kanungu - Kihhi



C433_Link02 Kanungu - Kihhi



C162_Link03 Kabulasoke - Madu



B103_Link02 Villa Maria - Sembabule



B103_Link02 Villa Maria - Sembabule

4.0 Observations

- a) In general, most of the roads were in fair to good state with the exception of the following that are already in poor state:
- Busega – Mpigi 25.4km
 - Mpigi – Buwama 32.0km
 - Buwama – Lukaya 30.5km rehabilitation ongoing along the swamp sections
 - Lukaya - Masaka - bypass 34.0km
 - Masaka – Lyantonde 67.8km
 - Lyantonde - Mbarara (Bushenyi junction) 67.3km
 - Mbarara (Bushenyi Junction) – Ntungamo 61.8km
 - Ntungamo – Rubaale 14.9km
 - Rubaale - Muhanga – Kabale 59.4km
 - Kabale – Katuna 44.2km
 - Ishanyu – Bwizibwera 45.9km
 - Bwizibwera – Ibanda 44.4km
 - Kabale - Ikumba – Muko 42.0km
 - Muko - Nyakabande – Kisoro 12.1km
 - Kagamba – Kebisoni 20.6km
 - Kebisoni - Rukungiri 13.9km
 - Kasese - Kilembe Mines 11.7km
- b) A number of links were not analyzed due to the ongoing rehabilitation works These are:
- A004_Link01 Masaka roundabout - Kyotera
 - A004_Link02 Kyotera – Mutukula
 - B103_Link01 Nyendo - Villa Maria
 - A005_Link15 Kikorongo - Bwera – Mpondwe
- c) There were noted inconsistencies in the following roads links that were not in the software routing. Data was captured manually.
- C360_Link02 Isingiro – Ngarama 6km; and
 - C446_Link02 Nyamirama - Kikongi – Burama 15.7km
- d) The network condition is characterized by surface defects and drainage blockages

5.0 Recommendations

To safeguard mobility and preserve asset value across the assessed network, the following actions are recommended:

- **Accelerate Design Interventions:** Expedite implementation of rehabilitation works on severely deteriorated links where designs have already commenced. For links still pending design, initiate planning immediately to prevent further degradation and economic losses.
- **Prioritize Preventive Maintenance:** Deploy targeted maintenance interventions, especially on sections with surface defects and blocked drainage. This includes:
 - Scraping off silt deposited from adjoining access roads.
 - Desilting roadside and cross-drainage structures to restore hydraulic function.
 - Reinstating shoulder integrity and edge stability to prevent width loss and drop-offs.
- **Strengthen Data Integration:** Resolve routing inconsistencies in the asset management software to ensure complete coverage and accurate referencing of all links, including manually captured segments like C360_Link02 and C446_Link02.
- **Enhance Monitoring and Stakeholder Coordination:** Establish a routine visual inspection schedule and improve coordination with district-level maintenance units to ensure timely reporting and response to emerging defects.



6.0 Conclusion

The survey provided critical insights into pavement performance and maintenance needs. The findings underscore the urgency of addressing deteriorated links, improving drainage, and reinforcing preventive maintenance strategies. With timely interventions and strengthened planning, the Ministry can ensure year-round mobility, reduce lifecycle costs, and enhance road safety and serviceability for all users.

Prepared by

Mutalya Paul
Engineer (Civil)

Annex 1: List of Roads Surveyed

Road_No	Link_ID	Link_Name	Length(km)
A002	A002_Link02	Busega - Mpigi	25.4
A002	A002_Link03	Mpigi - Buwama	32.0
A002	A002_Link04	Buwama - Lukaya	30.5
A002	A002_Link05	Lukaya - Masaka - bypass	34.0
A002	A002_Link06	Masaka - Lyantonde	67.8
A002	A002_Link07	Lyantonde - Mbarara (Bushenyi junction)	67.3
A002	A002_Link08	Mbarara (Bushenyi Junction) - Ntungamo	61.8
A002	A002_Link09	Ntungamo - Rubaale	14.9
A002	A002_Link10	Rubaale - Muhanga - Kabale	59.4
A002	A002_Link11	Kabale - Katuna	44.2
A004	A004_Link01	Masaka roundabout - Kyotera	44.7
A004	A004_Link02	Kyotera - Mutukula	32.2
A005	A005_Link01	Busega - Bujuuko	26.8
A005	A005_Link02	Bujuuko - Mityana	17.8
A005	A005_Link12	Rwimi (bridge) - Hima - Mubuku	11.6
A005	A005_Link13	Mubuku - Kasese	22.0
A005	A005_Link14	Kasese - Kikorongo	38.2
A005	A005_Link15	Kikorongo - Bwera - Mpondwe	10.1
B103	B103_Link01	Nyendo - Villa Maria	36.0
B103	B103_Link02	Villa Maria - Sembabule	18.9
B150	B150_Link01	Ishanyu - Bwizibwera	45.9
B150	B150_Link02	Bwizibwera - Ibanda	44.4
B150	B150_Link03	Ibanda - Muziza - Kamwenge	4.9
B151	B151_Link01	Ishanyu - Kabwohe	26.2
B151	B151_Link03	Kabwohe - Ishaka	28.1
B152	B152_Link01	Ntungamo - Kagamba	15.2
B152	B152_Link02	Kagamba - Ishaka	35.9
B152	B152_Link03	Ishaka - Buhinda - Rugazi	39.3
B152	B152_Link04	Rugazi - Katunguru - Kikorongo	33.1
B153	B153_Link01	Kabale - Ikumba - Muko	42.0
B153	B153_Link02	Muko - Nyakabande - Kisoro	12.1
B153	B153_Link03	Kisoro - Bunagana	33.8
B153	B153_Link03	Kisoro - Bunagana	33.8
C161	C161_Link01	Mpigi Loop	3.4
C162	C162_Link01	Mpigi - Kanoni	59.0
C162	C162_Link02	Kanoni - Kabulasoke	11.4
C162	C162_Link03	Kabulasoke - Madu	19.7
C166	C166_Link01	Madu - Kisozi - R. Katonga	22.1
C166	C166_Link02	R. Katonga - Sembabule	22.0
C198	C198_Link01	Budo - Nakasozi	3.7
C199	C199_Link01	Nabbingo Access Road	1.5
C210	C210_Link01	Nyendo - Masaka	5.4
C211	C211_Link01	Nyendo - Lambu Port Junction	30.8
C211	C211_Link02	Lambu Port Junction - Bukakata	5.0
C212	C212_Link01	Bukakata - Lambu Port	5.0
C214	C214_Link02	Lumbugu - Kyotera	4.5
C231	C231_Link01	Lumbugu - Rakai	16.2
C232	C232_Link01	Lyantonde - High Street	1.3
C235	C235_Link01	Villa Road Link	1.0
C350	C350_Link01	Katete - Isingiro	30.6
C350	C350_Link02	Isingiro - Nsongezi	23.7
C354	C354_Link01	Kikagati - Murungo Bridge	2.7
C355	C355_Link01	Nyakahita - Rushere	33.2
C355	C355_Link02	Rushere - Kazo	34.8
C356	C356_Link01	Ibanda - Kanoni - Kazo	32.4
C360	C360_Link02	Isingiro - Ngarama	6.1
C360	C360_Link03	Isingiro - Mabona Loop	7.1
C374	C374_Link01	Mahyoro Junction - Mahyoro Landing Site	4.6
C383	C383_Link01	Rushere - Rwakitura	8.6
C390	C390_Link01	Mbarara Bypass	14.0
C390N1	C390N1_Link01	Mbarara Bypass (dual)	14.0
C410	C410_Link01	Kagamba - Kebisoni	20.6

Road_No	Link_ID	Link_Name	Length(km)
C410	C410_Link02	Kebisoni - Rukungiri	13.9
C412	C412_Link01	Kisoro - Kyanika	9.9
C417	C417_Link01	Ntungamo - Kakukuru	13.5
C417	C417_Link02	Kakukuru - Kafunzo	16.1
C417	C417_Link03	Kafunzo - Kakitumba	6.0
C419	C419_Link02	Kikagati - Nsongezi	13.8
C420	C420_Link01	Kabale Access Roads	2.9
C428	C428_Link01	Nyamirama - Ishasha	14.9
C433	C433_Link02	Kanungu - Kihihi	22.2
C433	C433_Link03	Kihihi - Kazinga	4.1
C435	C435_Link01	Rukungiri - Campbell	14.0
C445	C445_Link03	Campbell - Bukurungu	6.4
C446	C446_Link02	Nyamirama - Kikongi - Burama	15.8
C452	C452_Link03	Mitooma HQ - Ruhinda/Kashenyi	11.5
C453	C453_Link01	Nyakabande - Muganzi	2.1
C457	C457_Link01	Kisoro - Muganzi - Chahi	5.1
C511	C511_Link01	Kasese - Kilembe Mines	11.7
C517	C517_Link01	Kasese Railway Station Road	0.8