

# *VISUAL CONDITION SURVEY (MOBICAP)*

## *FIELD SURVEY REPORT*

*JULY 2025*

## Introduction

The condition of paved roads plays a critical role in ensuring safe, efficient, and reliable transportation for road users. Regular visual assessments of the national road network are essential to monitor pavement deterioration, identify maintenance needs, and prioritize rehabilitation efforts.

This report presents the findings of a comprehensive visual assessment conducted to evaluate the current state of the paved roads within the Northern and North Eastern road network. The findings will support decision-making processes to enhance road safety, prolong pavement lifespan, and optimize infrastructure investments.

The following roads were assessed backwards

- A006\_Link03 Matuga - Wobulenzi
- C308\_Link01 Nakasongola loop
- A007\_Link05 Kumi - Soroti
- A007\_Link06 Soroti - Dokolo
- A007\_Link07 Dokolo - Agwata
- A007\_Link08 Agwata - Lira
- A007\_Link09 Lira - Ayer
- A007\_Link10 Ayer - Kamdini
- A008\_Link01 Karuma - Olwiyo
- B300\_Link04 Namalu - Chosan - Lokapel
- B300\_Link05 Lokapel - Ariamoi
- B305\_Link03 Kanyago Bridge - Kumi
- C681\_Link01 Acholibur - Aswa
- C681\_Link02 Aswa - Gulu


| Road_No | Link_ID     | Link_Name                           | Length(km) | Maintenance_Station | Maintenance_Region |
|---------|-------------|-------------------------------------|------------|---------------------|--------------------|
| A006    | A006_Link03 | Matuga - Wobulenzi                  | 28.9       | Luwero              | Central            |
| A006    | A006_Link04 | Wobulenzi - Kasana - Luweero        | 15.6       | Luwero              | Central            |
| A006    | A006_Link05 | Luweero - Nakasongola               | 54.8       | Luwero              | Central            |
| A006    | A006_Link06 | Nakasongola - Kafu                  | 52.2       | Luwero              | Central            |
| C154    | C154_Link01 | Matugga - Semuto - Kapeka           | 39.7       | Luwero              | Central            |
| C302    | C302_Link01 | Gayaza-Ziobwe                       | 30.9       | Luwero              | Central            |
| C308    | C308_Link01 | Nakasongola loop                    | 12.8       | Luwero              | Central            |
| C309    | C309_Link01 | Nakasongola - Airbase               | 6.7        | Luwero              | Central            |
| C335    | C335_Link01 | Sungira Hill Access                 | 1.6        | Luwero              | Central            |
| A006    | A006_Link09 | Karuma - Kamdini                    | 12.2       | Gulu                | Northern           |
| A006    | A006_Link10 | Kamdini - Minakulu                  | 24.2       | Gulu                | Northern           |
| A006    | A006_Link11 | Minakulu - Bobi - Gulu              | 37.5       | Gulu                | Northern           |
| A006    | A006_Link12 | Gulu - Atiak                        | 68.2       | Gulu                | Northern           |
| A006    | A006_Link13 | Atiak - Nimule(Uganda/Sudan border) | 37.3       | Gulu                | Northern           |
| A007    | A007_Link05 | Kumi - Soroti                       | 46.7       | Soroti              | North Eastern      |
| A007    | A007_Link06 | Soroti - Dokolo                     | 67.4       | Soroti              | North Eastern      |
| A007    | A007_Link07 | Dokolo - Agwata                     | 23.5       | Lira                | Northern           |
| A007    | A007_Link08 | Agwata - Lira                       | 31.1       | Lira                | Northern           |
| A007    | A007_Link09 | Lira - Ayer                         | 27.1       | Lira                | Northern           |
| A007    | A007_Link10 | Ayer - Kamdini                      | 44.0       | Lira                | Northern           |
| A008    | A008_Link01 | Karuma - Olwiyo                     | 51.6       | Gulu                | Northern           |
| A008    | A008_Link02 | Olwiyo - Packwach                   | 54.4       | Gulu                | Northern           |
| A008    | A008_Link03 | Packwach - Nebbi                    | 53.5       | Arua                | Northern           |
| A008    | A008_Link04 | Nebbi - Eruba                       | 63.8       | Arua                | Northern           |

|      |             |                                                  |      |        |               |
|------|-------------|--------------------------------------------------|------|--------|---------------|
| A008 | A008_Link05 | Eruba - Arua - Manibe                            | 18.8 | Arua   | Northern      |
| A008 | A008_Link06 | Manibe - Maracha - Koboko                        | 49.9 | Arua   | Northern      |
| A008 | A008_Link07 | Koboko - Oraba(Uganda/Sudan border)              | 18.8 | Arua   | Northern      |
| B251 | B251_Link01 | Gulu - Olwiyo                                    | 61.8 | Gulu   | Northern      |
| B252 | B252_Link03 | Acholibur - Kitgum                               | 19.8 | Kitgum | Northern      |
| B252 | B252_Link04 | Kitgum - Madi Opei                               | 45.5 | Kitgum | Northern      |
| B252 | B252_Link05 | Madi Opei - Uganda/Sudan border                  | 20.5 | Kitgum | Northern      |
| B300 | B300_Link04 | Namalu - Chosan - Lokapel                        | 58.8 | Moroto | North Eastern |
| B300 | B300_Link05 | Lokapel - Ariamoi                                | 45.8 | Moroto | North Eastern |
| B300 | B300_Link06 | Ariamoi - Moroto                                 | 11.0 | Moroto | North Eastern |
| B303 | B303_Link01 | Soroti - Arapai                                  | 8.0  | Soroti | North Eastern |
| B303 | B303_Link02 | Arapai - Katakwi - Irii                          | 81.9 | Soroti | North Eastern |
| B303 | B303_Link03 | Irii - Akisim (Lorengchora) - Ariamoi - Nadunget | 68.8 | Moroto | North Eastern |
| B305 | B305_Link03 | Kanyago Bridge - Kumi                            | 25.9 | Soroti | North Eastern |
| C649 | C649_Link01 | Lira Army Barracks Access                        | 1.4  | Lira   | Northern      |
| C650 | C650_Link01 | Lira - Akia                                      | 8.2  | Lira   | Northern      |
| C668 | C668_Link01 | Agwata Bypass                                    | 1.6  | Lira   | Northern      |
| C669 | C669_Link01 | Lira Railway Access                              | 2.3  | Lira   | Northern      |
| C679 | C679_Link01 | Lira bypas                                       | 3.8  | Lira   | Northern      |
| C681 | C681_Link01 | Acholibur - Aswa                                 | 45.1 | Kitgum | Northern      |
| C681 | C681_Link02 | Aswa - Gulu                                      | 38.6 | Gulu   | Northern      |
| C683 | C683_Link01 | Layibi - Custom corner                           | 3.9  | Gulu   | Northern      |
| C684 | C684_Link01 | Gulu Airport road                                | 4.1  | Gulu   | Northern      |
| C744 | C744_Link01 | Eruba - Vurra                                    | 9.4  | Arua   | Northern      |
| C923 | C923_Link01 | Arapai - Railway Station                         | 1.9  | Soroti | North Eastern |
| C947 | C947_Link01 | Soroti State Lodge                               | 2.0  | Soroti | North Eastern |

## Pictorial Evidence of Roads in both poor and good conditions

### C963\_Link01 Moroto - Lokitanyara 28km


This road has been paved, it needs to be updated in mobicap (upaved to paved). It was assessed backwards on manual sheets.

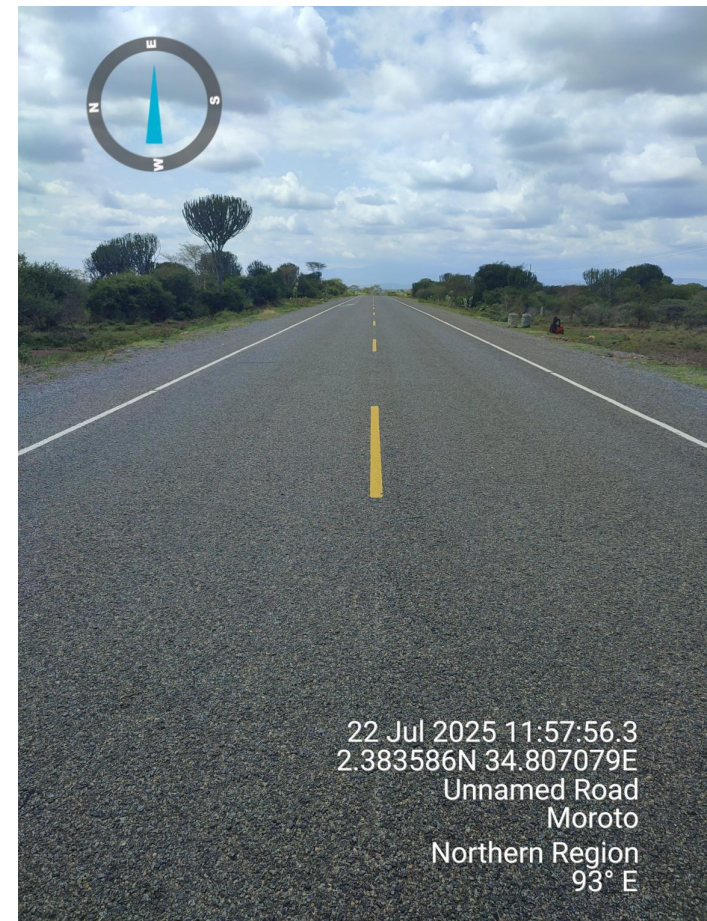




### B303\_Link03 Iriri - Akisim (Lorengchora) - Ariamoi - Nadunget

The big potholes affect drainage on road which severally deteriorates some segments

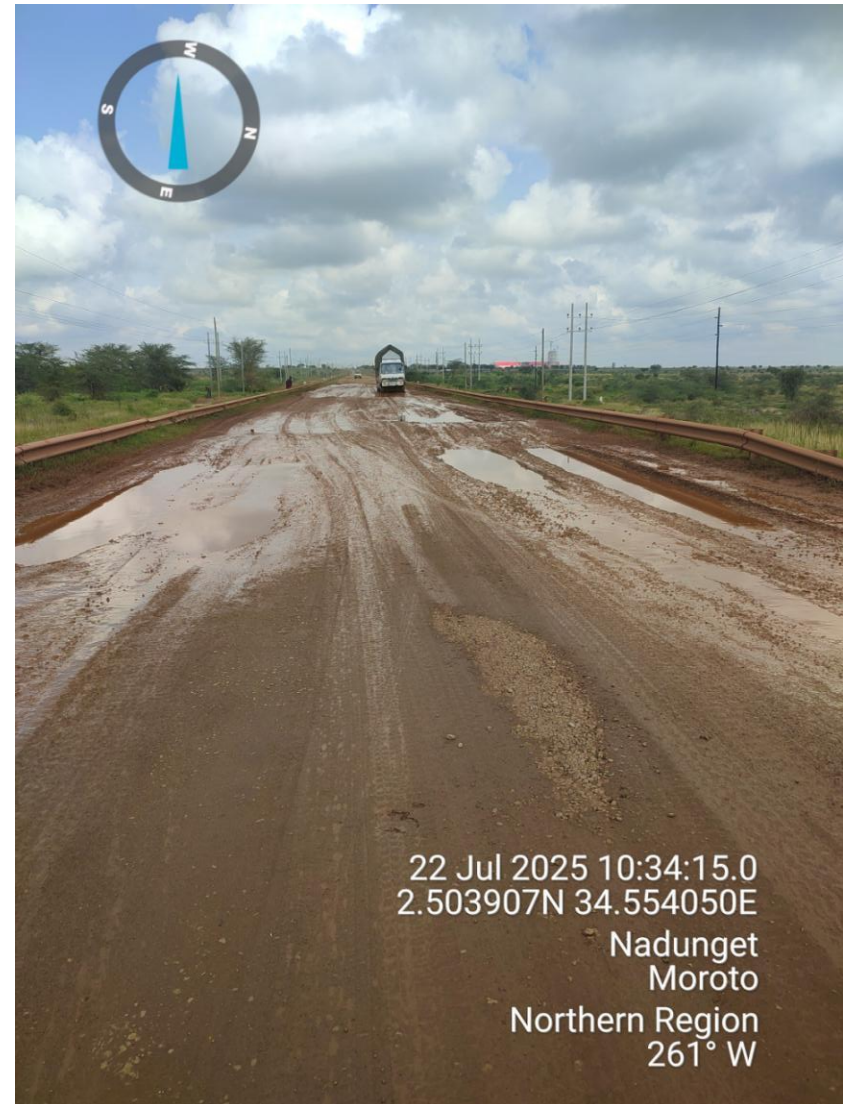



**B300\_Link 06 Ariamoi - Moroto**

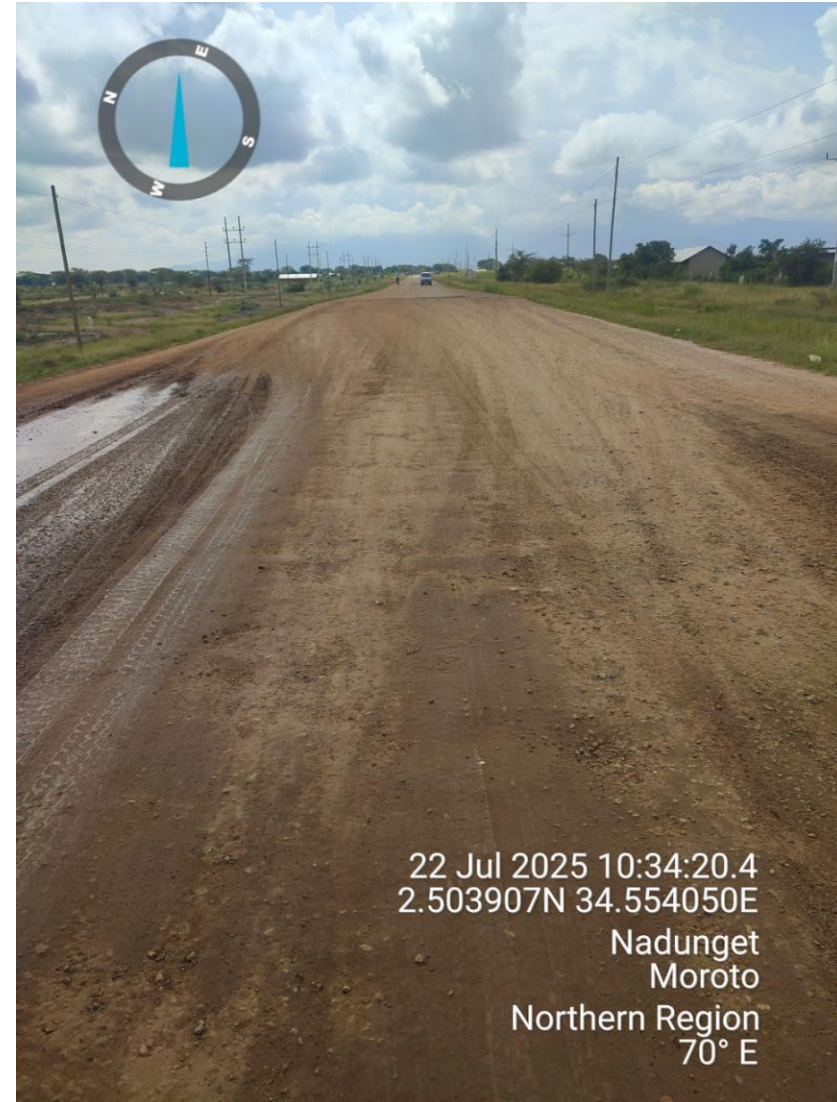




## A007\_Link06 Soroti - Dokolo

Section Severely affected by potholes. The rest of the road has been worked on.





## A007\_Link07 Dokolo - Agwata

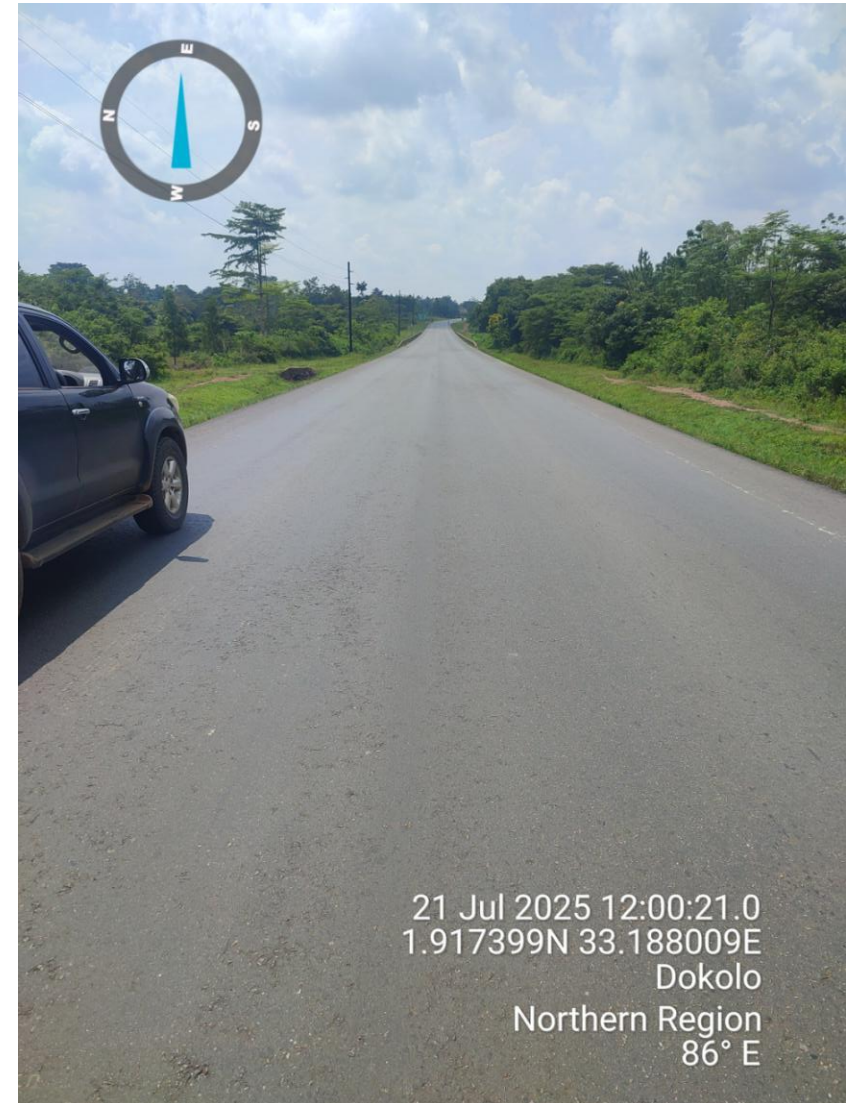




**A007\_Link08 Agwata - Lira**




## C669\_Link01 Lira Railway Access

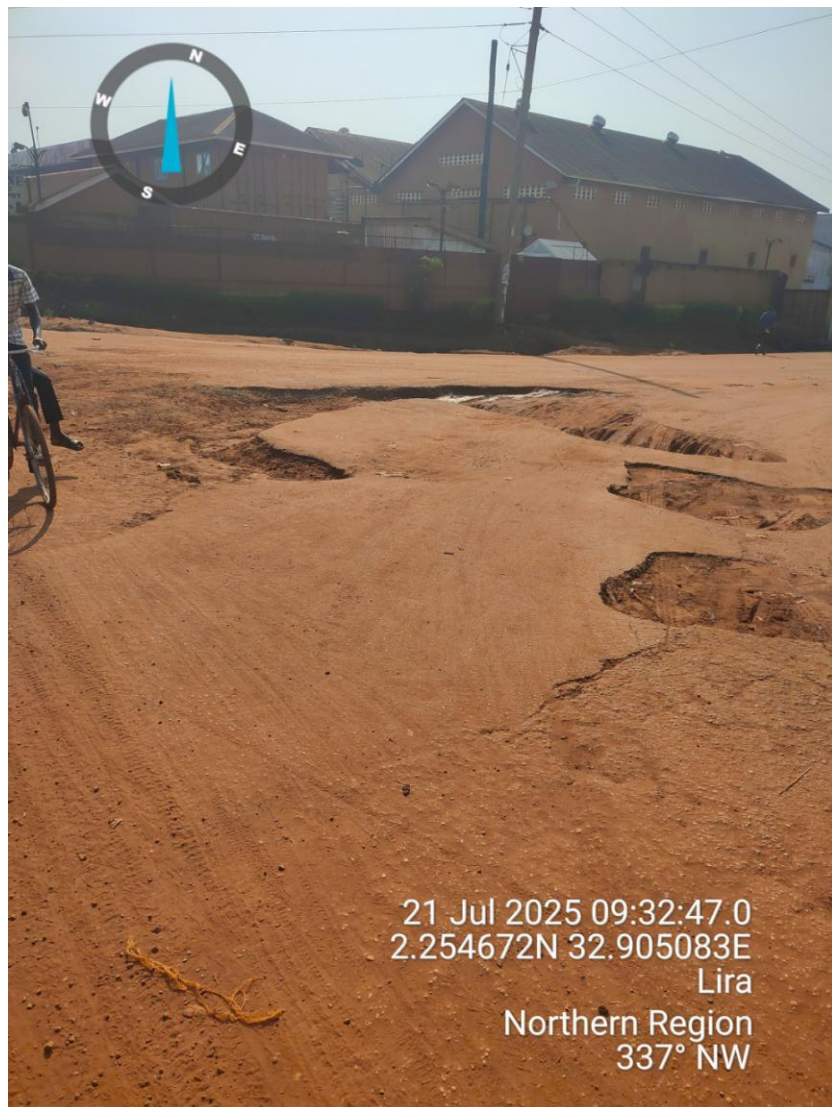




**A007\_Link09 Lira - Ayer**

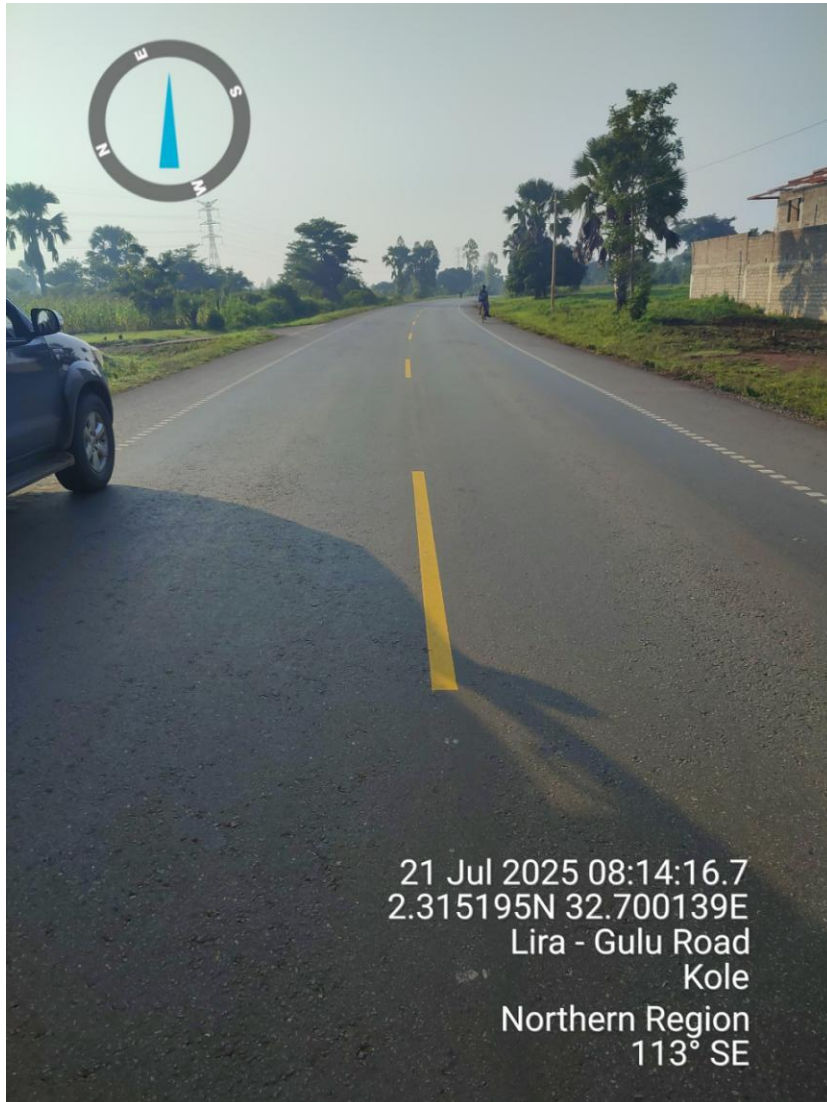

**A007\_Link10 Ayer - Kamdini**





**A008\_Link01 Karuma - Olwiyo**

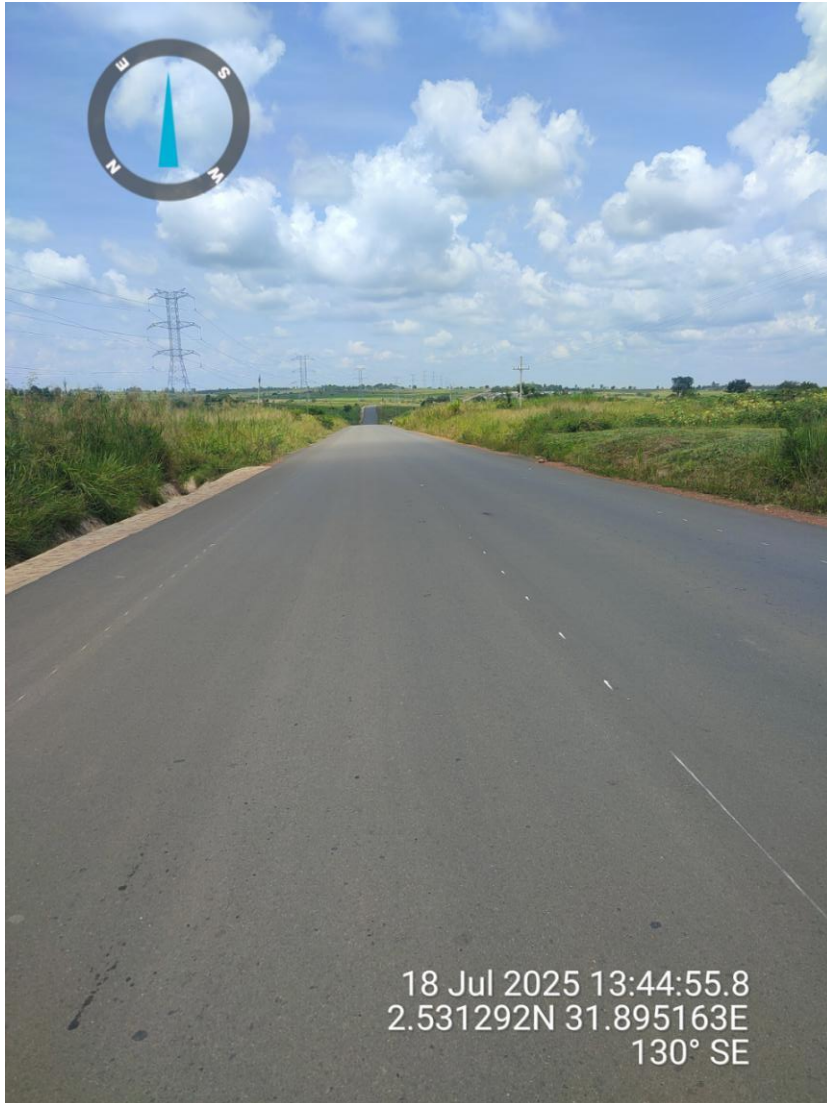




**A008\_Link02 Olwiyo - Packwach**

Section of the road that is not yet worked on, contractor on site

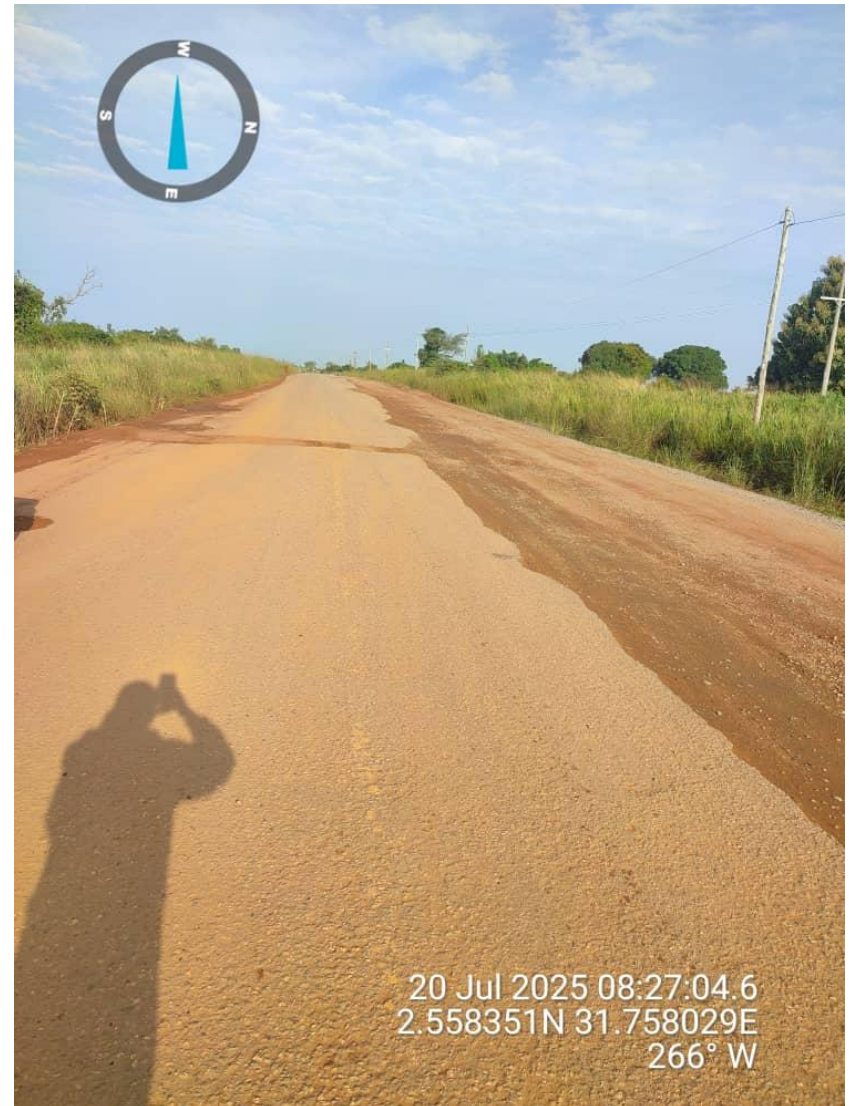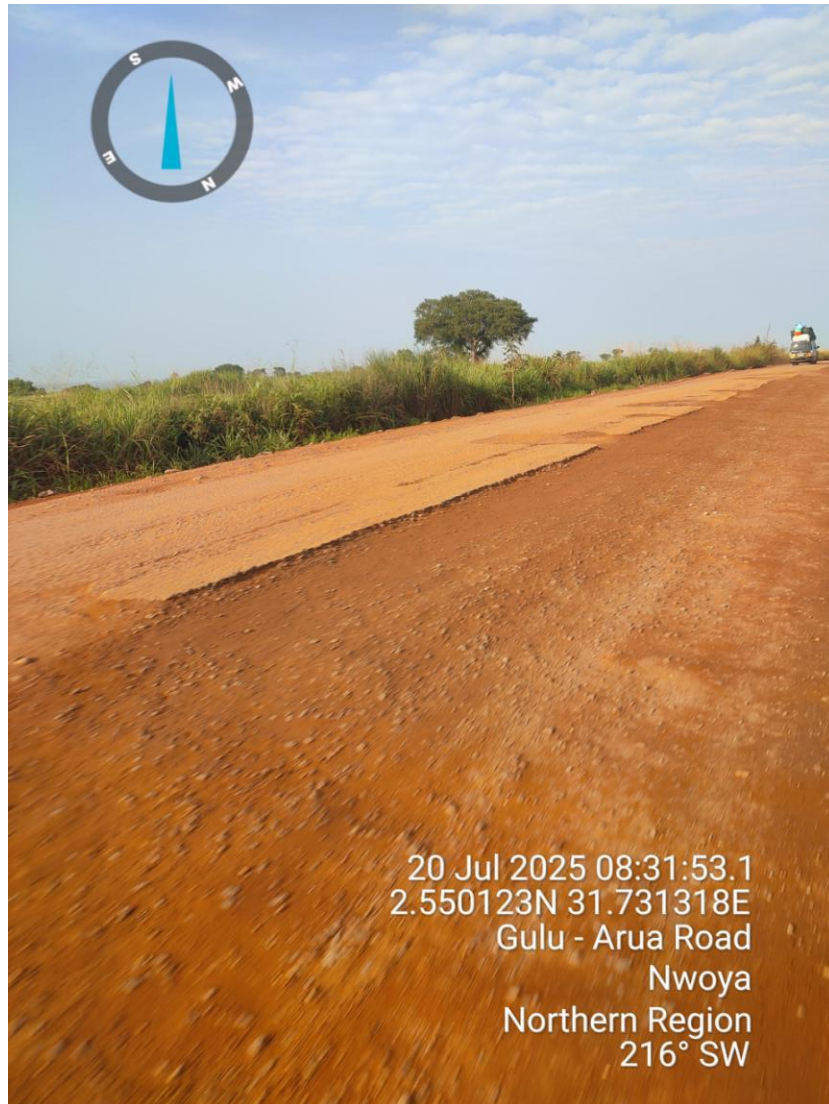



**A008\_Link03 Pakwach - Nebbi**

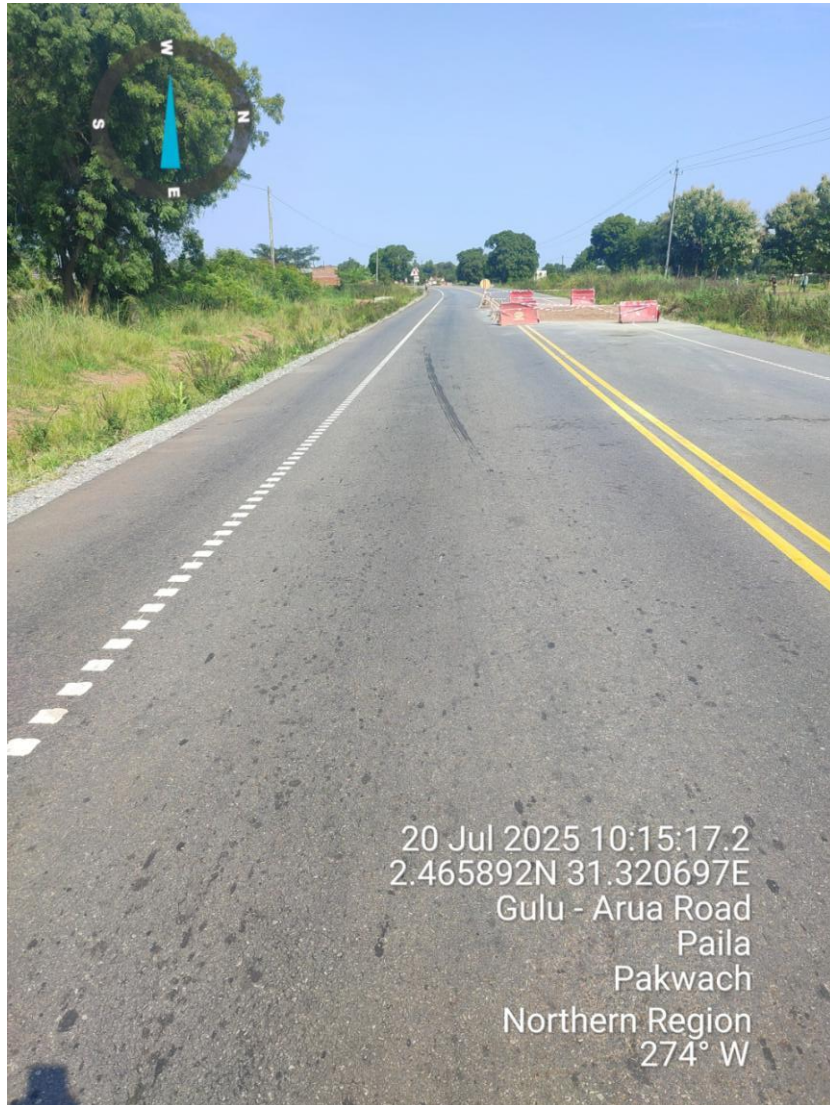




A008\_Link04 Nebbi - Eruba






**A006\_Link12 Gulu - Atiak**

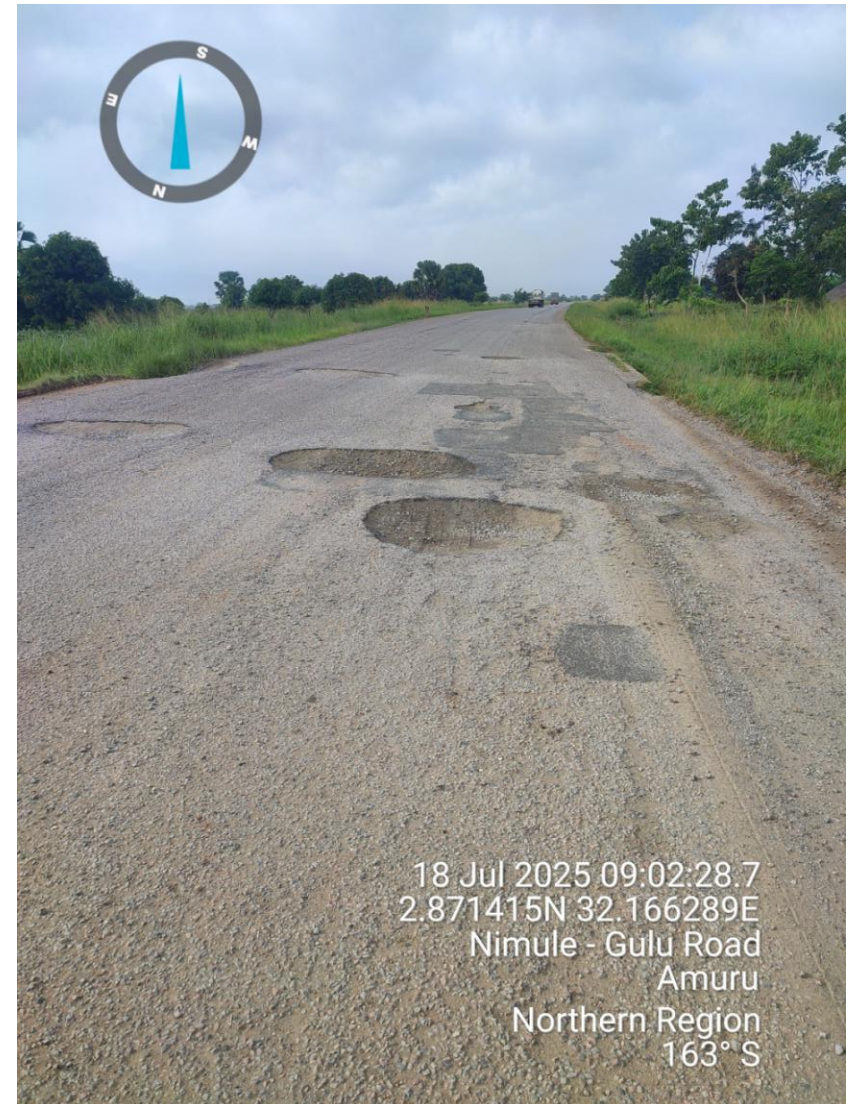




**A006\_Link13 Atiak - Nimule(Uganda/Sudan border)**

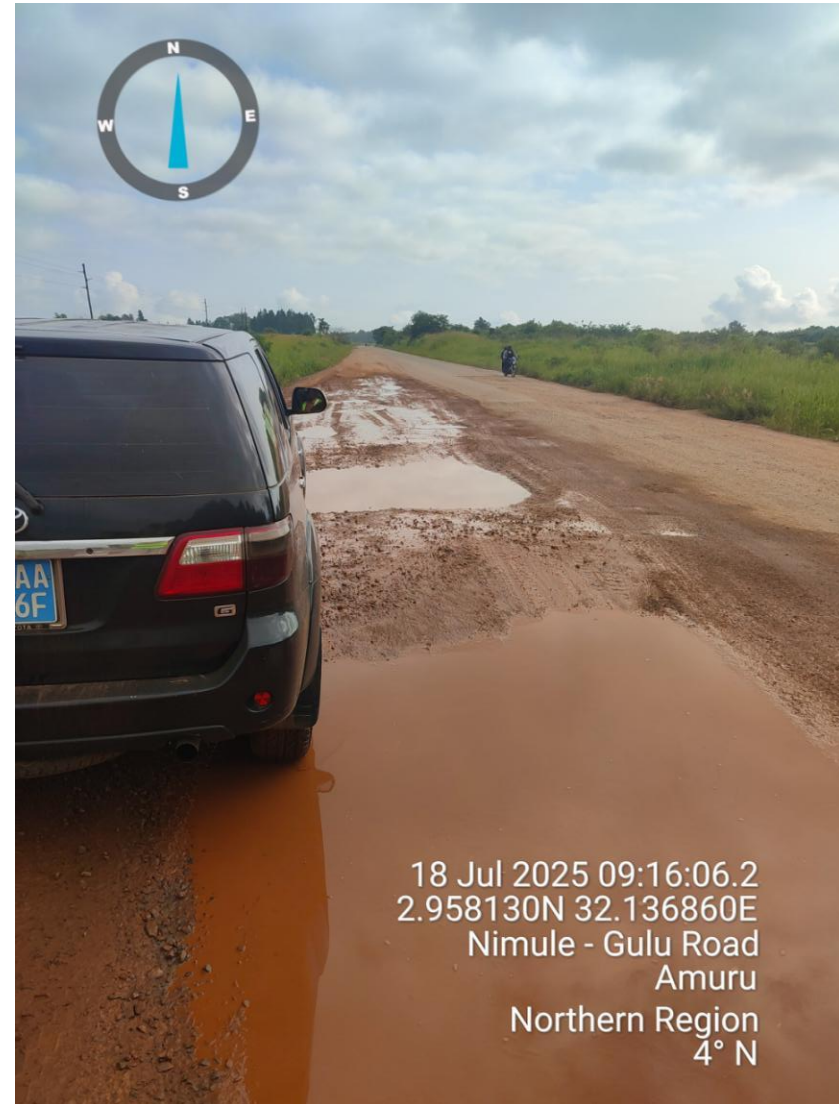



## C154\_Link01 Matugga - Semuto - Kapeka

Severe defects, however, there is a contractor with on going works

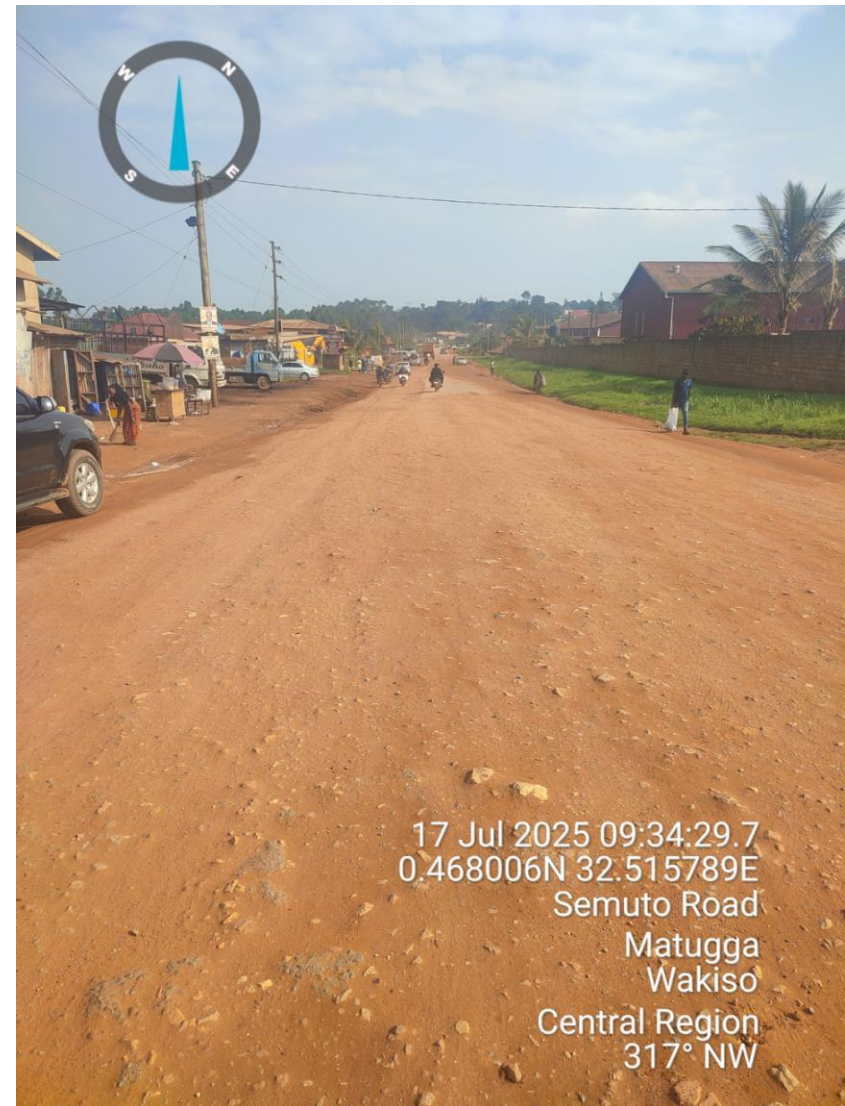



## B305\_Link03 Kanyago Bridge - Kumi






## Other Observations/Challenges

### B300\_Link04 Namalu - Chosan - Lokapel

This road ends half way into the link, creates a bottle neck to an impassable route, with this, the assessment of this road was incomplete hence failure for the road link to turn green.

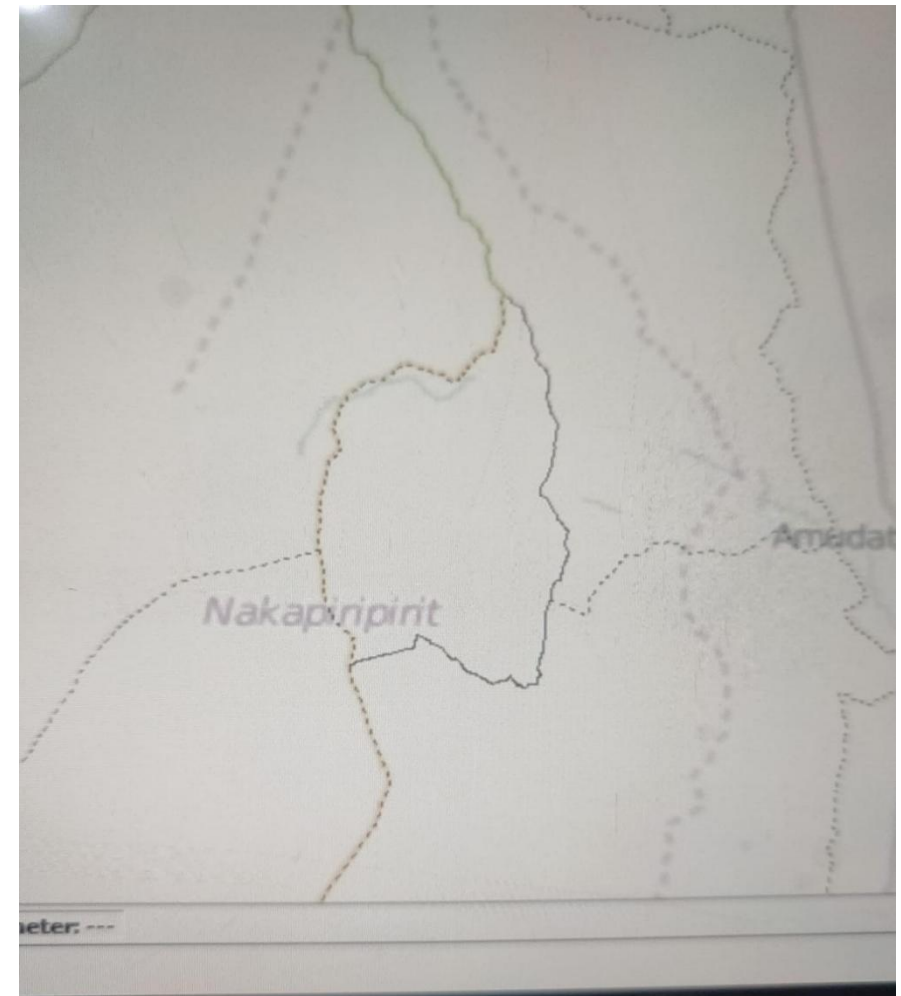



The end of A007\_Link07 Dokolo - Agwata and start of A007\_Link08 Agwata - Lira with the C668\_Link01 Agwata Bypass can be improved



**B252\_Link05 Madi Opei - Uganda/Sudan border 20.5 Km**

This road link was assessed, however due to security reasons, we were advised by the border security personnel not to get to the end of the link to avoid possible detainment and car highjacking.

Since the road link has no traffic due to its hostility nature, we assessed it basing on the existing initial features.

## **Conclusion**

Overall exercise was carried out successfully